


Ajustable RPLUS Kit (Ref: 62057002)

1/7

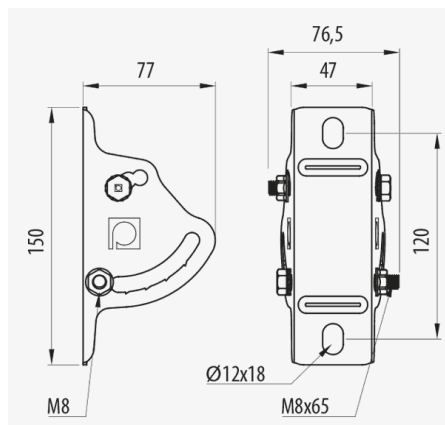

Description

Reinforced support RPLUS coupling kit that allows the creation of variable angles on inclined walls for the installation of Rejiband® and Pemsaband® trays and Megaband® ladder of 100, 150, 200, 300, 400, 500 and 600 mm wide. With INOX protection system, I304 finish. Mounting screws for the bracket are included. Made of steel and available in various Protection Systems.

Advantages

Suitable for arches of tunnels, galleries and sloping walls.

Different fixing positions to the sloping wall. Angles from 40° to 140° depending on the position.

Available in various protection systems: GC and stainless steel AISI304 and AISI316L.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Mounting screws for the support are included.

Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000896	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		INOX	
Finish		Stainless Steel AISI 304	
Resistance Class		Class 9C	
kg/u		0,351	
u		4	
Material		Stainless steel AISI 304	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Load diagrams

□

Product applications

