


Ajustable RPLUS Kit (Ref: 62067002)

1/7

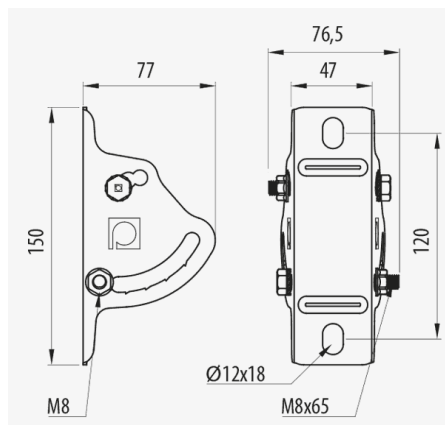

Description

Reinforced support RPLUS coupling kit that allows the creation of variable angles on inclined walls for the installation of Rejiband® and Pemsaband® trays and Megaband® ladder of 100, 150, 200, 300, 400, 500 and 600 mm wide. With INOX protection system, I316L finish. Mounting screws for the bracket are included. Made of steel and available in various Protection Systems.

Advantages

Suitable for arches of tunnels, galleries and sloping walls.

Different fixing positions to the sloping wall. Angles from 40° to 140° depending on the position.

Available in various protection systems: GC and stainless steel AISI304 and AISI316L.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Mounting screws for the support are included.

Applications

Suitable for supporting high loads of cable trays for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



TUNNELS INFRASTRUCTURES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



ETIM 10	EC000896	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Acero inoxidable AISI 316L
Protection System	INOX	Working temperature range (°C)	-50 / 150 °C
Finish	Stainless Steel AISI 316L	Fire resistance	A1 No combustible
Resistance Class	Class 9D		
kg/u	0,351		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Reijband, Pemsaband, Inducanal, Rejtech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Load diagrams

□

Product applications

