

Assembly Accessories

30/10/2026

# Conduits Clip ( Ref: 32095200 )



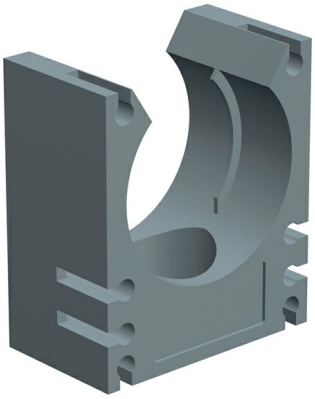

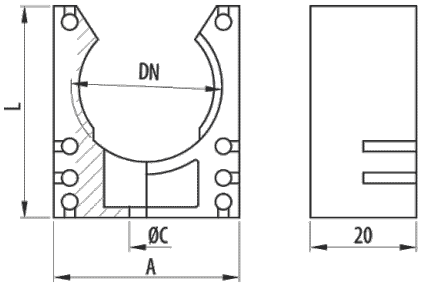


## Description

Support for fixing flexible conduits from the Pemsaflex® range to the wall or channel. Made from self-extinguishing polyamide 6 in RAL 7011 grey and black RAL 9005, halogen-free, flame-retardant and available in various sizes. It allows the rotation, but not any axial movement. Easy to install using the rail clip and, by using the joint clip, several can be joined together to form blocks.

## Advantages

Quick connection of the tube by allowing free rotation and prevents any axial movement.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Easy to install using the rail clip. Several can be joined by forming blocks and using a joint clip.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Working temperature: -25°C to + 105°C.

## Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Conduits Clip ( Ref: 32095200 )

## Product data

| | |
|---|---|
| **ETIM 10** | EC000368 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | |
| **Colour** | Black RAL 9005 |
| **DN** | NW12 |
| **L (mm)** | 26 |
| **A (mm)** | 22 |
| **B (mm)** | 20 |
| **Ø C (mm)** | 5.5 |

| | |
|---|---|
| **kg/u** | 0,006 |
| **u** | 50 |
| **Material** | Polyamide 6 |
| **Working temperature range (°C)** | -25 / 105 ºC |
| **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."