


Conduits Clip PA6

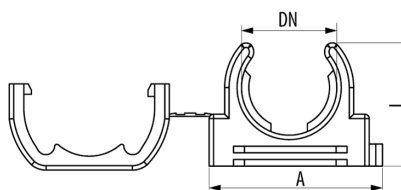

Description

Support for fixing flexible conduits in Easy to install using the rail clip and, by using the joint clip, several can be joined together to form blocks.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Click connection system that allows easy and fast coupling to the conduit.

Working temperature: -40°C to + 120°C.

Protection index EN 60529: IP54.

CE certified in compliance with the low voltage directive 2014/35 / EU

Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics				
 Colour: Grey RAL 7031, Black RAL 9005		 DN NW 7, NW10, NW12, NW14, NW17, NW23, NW29, NW36, NW48		 Polyamide 6
		ETIM 10		 -40 / 120 °C
 LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA		EC000368		

Product data							
Colour	DN	L _{mm}	A _{mm}	B _{mm}	Ref	kg/u	kg
Grey RAL 7031	NW 7	15	24.5	18	31094000	0,005	100
Grey RAL 7031	NW10	15	24.5	18.5	31094100	0,005	50
Grey RAL 7031	NW12	21	30	18.5	31094200	0,005	50
Grey RAL 7031	NW14	24	34	18.5	31094300	0,007	50
Grey RAL 7031	NW17	28	39	18.5	31094400	0,008	50
Grey RAL 7031	NW23	37	51	18.5	31094500	0,011	25
Grey RAL 7031	NW29	45.5	62	19.5	31094600	0,017	25
Grey RAL 7031	NW36	55.5	74.5	22	31094700	0,020	25
Grey RAL 7031	NW48	71	95.5	24.5	31094800	0,030	10
Black RAL 9005	NW 7	15	24.5	18	32094000	0,005	100
Black RAL 9005	NW10	15	24.5	18.5	32094100	0,005	50
Black RAL 9005	NW12	21	30	18.5	32094200	0,005	50
Black RAL 9005	NW14	24	34	18.5	32094300	0,007	50
Black RAL 9005	NW17	28	39	17.5	32094400	0,008	50
Black RAL 9005	NW23	37	51	18.5	32094500	0,011	25
Black RAL 9005	NW29	45.5	62	19.5	32094600	0,017	25
Black RAL 9005	NW36	55.5	74.5	22	32094700	0,020	25
Black RAL 9005	NW48	71	95.5	24.5	32094800	0,030	10

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene

Conduits Clip PA6

- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

