41x21 Cantilever Arm Pendant

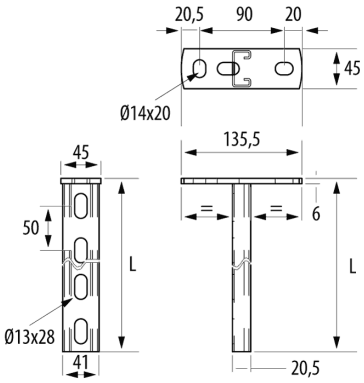

Description

41x21mm vertical pendulum-type channel support for ceiling fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Protection index EN 60529: IP67.

Load values according to international standard IEC 61537.

Available in PG and GC Protection Systems

CE conformity in accordance to the low voltage directive 2014 /35 /UE.

Applications

Application as a vertical ceiling support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others). Also suitable for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

41x21 Cantilever Arm Pendant

Main technical characteristics

EZ | Class 3 | 500, 1000 | 1 | Steel with surface coating | -50 / 150 °C | A1 No combustible

ETIM 10
EC001003

Product data

	REF	kg/u	CTA
500	82002603	1,040	94
1000	82002604	1,770	36

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."