


41x41 Cantilever Arm Pendant

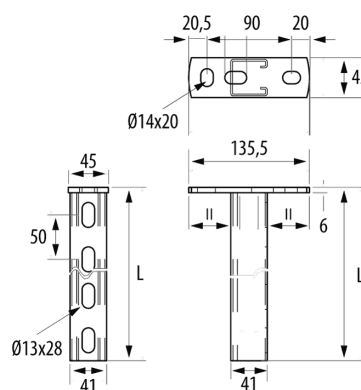

Description

41x41mm vertical pendulum-type channel support for ceiling fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Protection index EN 60529: IP67.

Load values according to international standard IEC 61537.

Available in GC Protection Systems and INOX, Stainless steel AISI 304 and AISI 316L.

CE conformity in accordance to the low voltage directive 2014 /35 /UE.

Applications

Application as a vertical ceiling support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others). Also suitable for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Main technical characteristics

 500, 600, 800, 1000	 1	 -25 / 105 °C	 A1 No combustible	ETIM 10 EC001003
---	---	--	---	---------------------

Product data

	 61537		Ref	kg/u		
GC	Class 6	500	82002610	1,710	Steel with surface coating	165
GC	Class 6	600	82002611	1,980	Steel with surface coating	141
GC	Class 6	800	82002612	2,510	Steel with surface coating	107
GC	Class 6	1000	82002613	3,050	Steel with surface coating	85
INOX	Class 9C	500	82002616	1,390	Stainless steel AISI 304	165
INOX	Class 9C	600	82002617	1,600	Stainless steel AISI 304	141
INOX	Class 9D	500	82002620	1,390	Acero inoxidable AISI 316L	165
INOX	Class 9D	600	82002621	1,600	Acero inoxidable AISI 316L	141
EZ	Class 3	800	82004241	2,430	Steel with surface coating	
EZ	Class 3	1000	82004242	2,950	Steel with surface coating	


 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Load diagrams

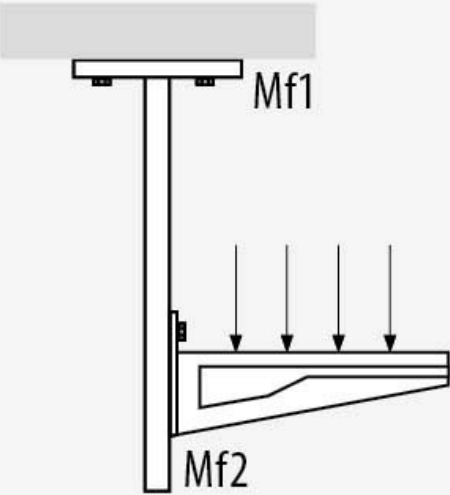↓CTA↓ (kg)		kg	Mf1 kg.m	Mf2 kg.m
	500	350	36	43
	1000	350	36	43

Product applications

41x41 Cantilever Arm Pendant

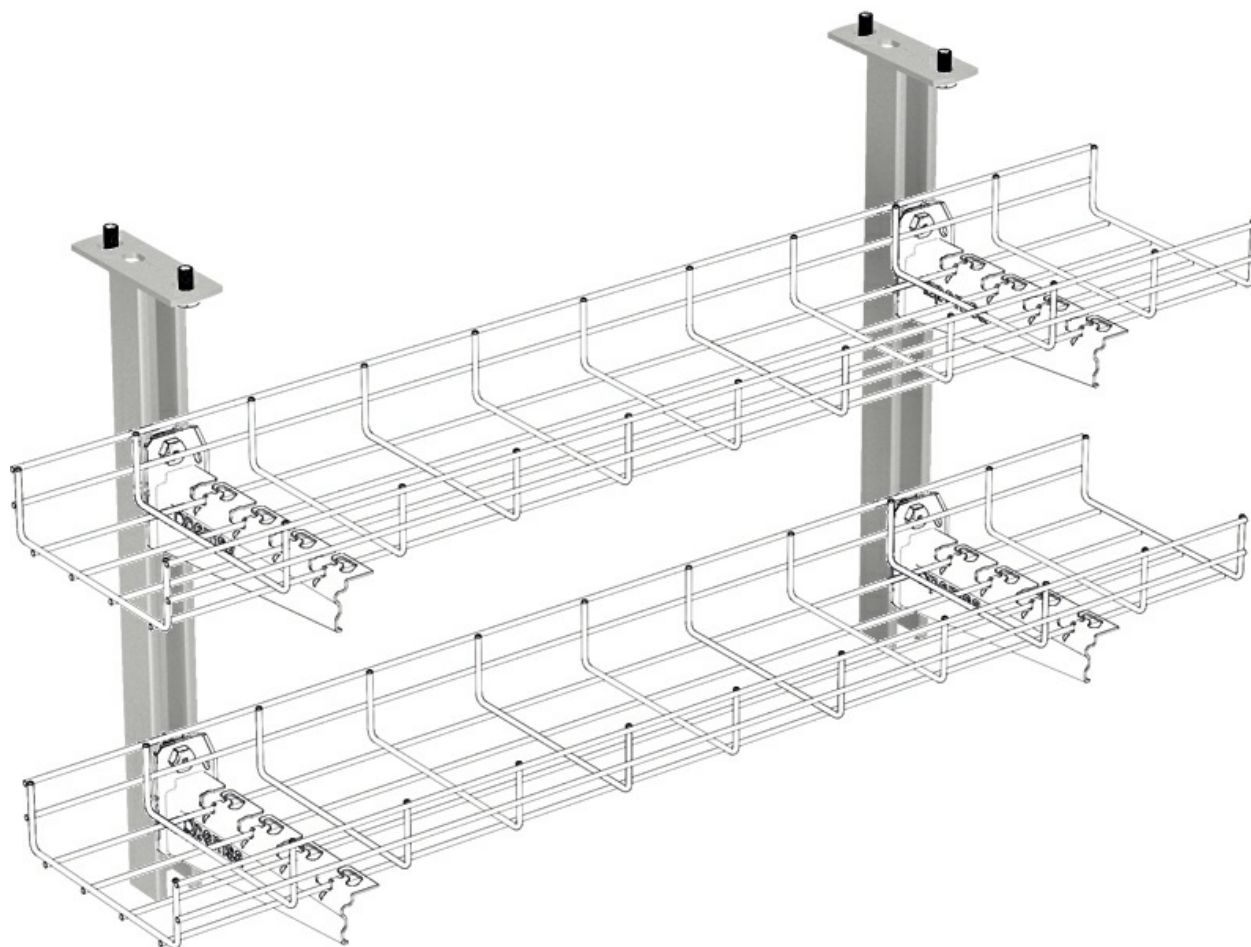

41x41 Cantilever Arm Pendant

