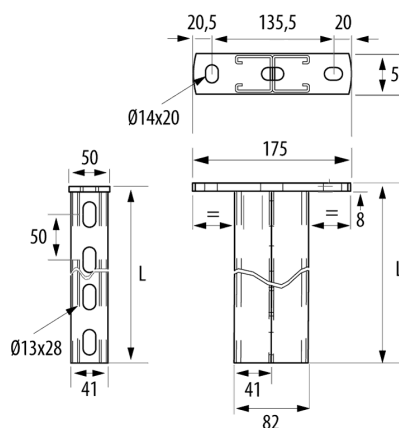


41x82 Cantilever Arm Pendant (Ref: 82002625)



Description

41x21mm horizontal support for wall fixing of cable trays, electrical conduits and other heating pipe installations, A/C, fire protection systems, etc. Width 1000 mm, With GC protection system. Excellent loading capacity. Robust and secure system. Made of steel, available in various protection systems.

Advantages

Available in PG and GC Protection Systems

Available in widths from 100 to 1000 mm depending on the protection system. It has wide fixing options.

This range of Cantilever arms 41 has a quick installation solution when using the Strut clip, part number 67030049, making it a quick and safe installation option for Rejiband® wire mesh trays.

The total length of the support is: (cable tray width + 55mm), that is, it has an additional measure of length to favor the separation of the installation from the facing or surface.

Load values according to international standard IEC 61537.

Applications

Application as a horizontal wall support. For supporting Cable Trays (rejiband®, pemsaband®, megaband®, among others) but it is also very useful for supporting electrical conduits and other heating pipe installations, A/C, fire systems etc.

Solutions



Cantilever Arm Pendant 41

09/10/2026

41x82 Cantilever Arm Pendant (Ref: 2/4)

82002625)

Product data

ETIM 10	EC001003	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	15,488	Material	Steel with surface coating
Protection System	GC	SWL (kg)	198
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-25 / 105 °C
Resistance Class	Class 6	Fire resistance	A1 No combustible
Width (mm)	1000		
kg/u	5,980		

Protection System

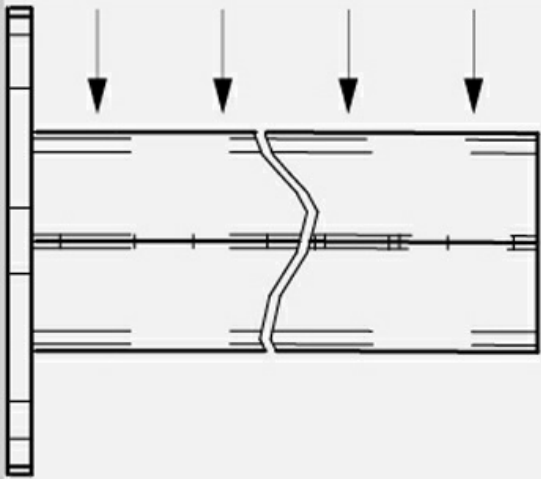
- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

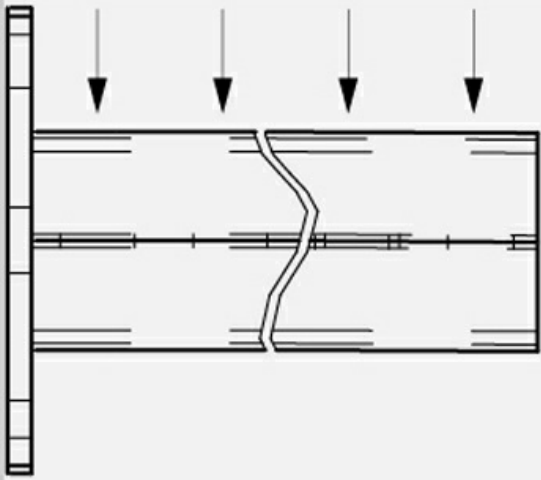
Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

41x82 Cantilever Arm Pendant (Ref: 82002625)

Load diagrams

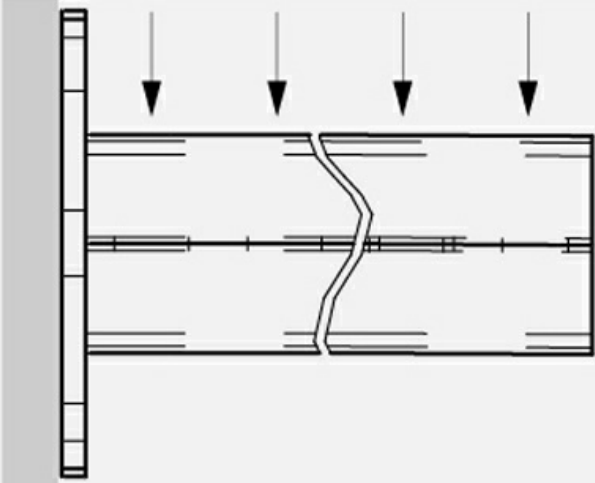
↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

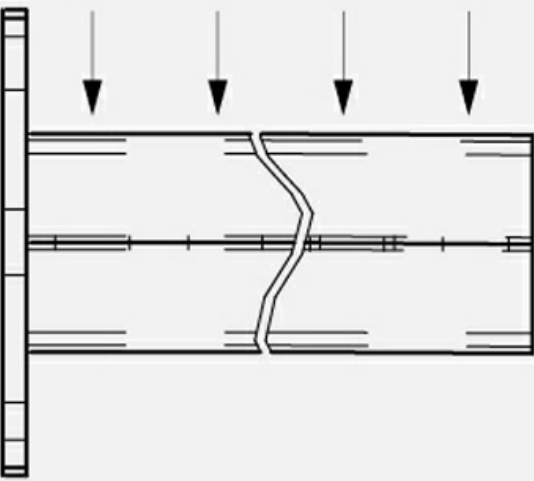
↓CTA↓ (kg)		kg
	500	376
	600	318
	800	247
	1000	198

Product applications



41x82 Cantilever Arm Pendant (Ref: 82002625)

↓CTA↓ (kg)		⏏	kg
□□□□□ 		500	376
		600	318
		800	247
		1000	198

↓CTA↓ (kg)		⏏	kg
		500	376
		600	318
		800	247
		1000	198

