


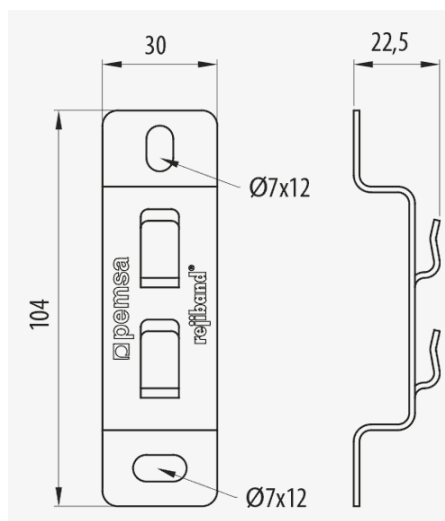

Description

Rejiband® support in steel used for the wall installation of the Rejiband® wire mesh tray 60 mm high and 60, 100 and 150 mm wide. With INOX protection system, I316L finish. Can also be used for ceiling installation with rod. Quick assembly thanks to the Click system of connection without the need of screws. Available in various Protection Systems.

Advantages

Available in different protection systems: EZ, BK8, GC, and stainless steel AISI 316.

It allows the introduction of cables into the tray from the side.

Fixing by quick mount click system.

Can be used for ceiling installations with two rejiband trays using a bracket on each side of the tray.

Suitable for ceiling installation using an M8 threaded rod. It allows easy adjustment on the rod and only requires a nut for fixing.

Applications

Suitable for wall and ceiling mounting with threaded rod of Rejiband® wire mesh tray 60 mm wide and widths of 100 and 150. Suitable for electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



FOOD INDUSTRY



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001003	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		INOX	
Finish		Stainless Steel AISI 316L	
Resistance Class		Class 9D	
kg/u		0,042	
u		25	
Material		Acero inoxidable AISI 316L	
SWL (kg)		25	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

