
Ceiling Supports

Base Support 60



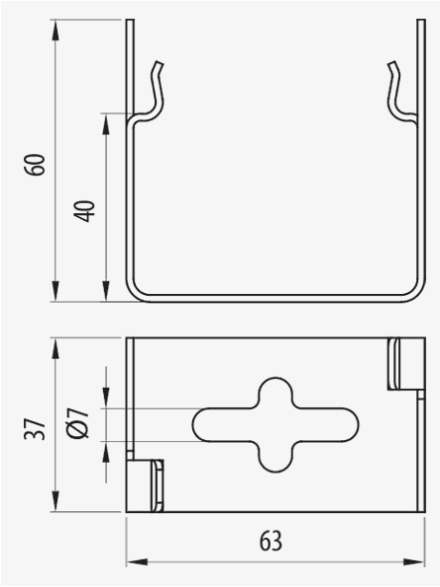

Description

Rejiband® light steel support for the channel, wall, ceiling or floor installation of the Rejiband® 35x60 & 60x60 mm wire mesh tray. Quick assembly thanks to the Click system of connection without the need of screws. Available in various Protection Systems.

Advantages

Fast mount system without the need for screws. Folding the fixing clips secures the tray.

For wall installation, use the side holes to secure with a M6 or M8 screw or bolt.

For ceiling installation, use M6 or M8 threaded rod connected through the centre of the bracket.

It allows the introduction of cables into the tray from the side.

Available in various protection systems: EZ, BC, GC, high resistance BK C8 and passivated stainless steel AISI 316.

Applications

Suitable for wall and ceiling mounting of the Rejiband® 35x60 and 60x60 mm wire mesh tray.

Solutions

FOOD INDUSTRY

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Base Support 60

Main technical characteristics

10 | -50 / 150 °C | A1 No combustible | ETIM 10 EC001003

Product data

Ⓢ	Class IEC 61537	REF	kg/u	Ⓜ
EZ	Class 3	62016022	0,067	Steel with surface coating
GC	Class 8	62036022	0,069	Steel with surface coating
INOX	Class 9D	62066022	0,066	Acero inoxidable AISI 316L
BK8	Class 8	62086022	0,068	Steel with surface coating

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Base Support 60

Product applications

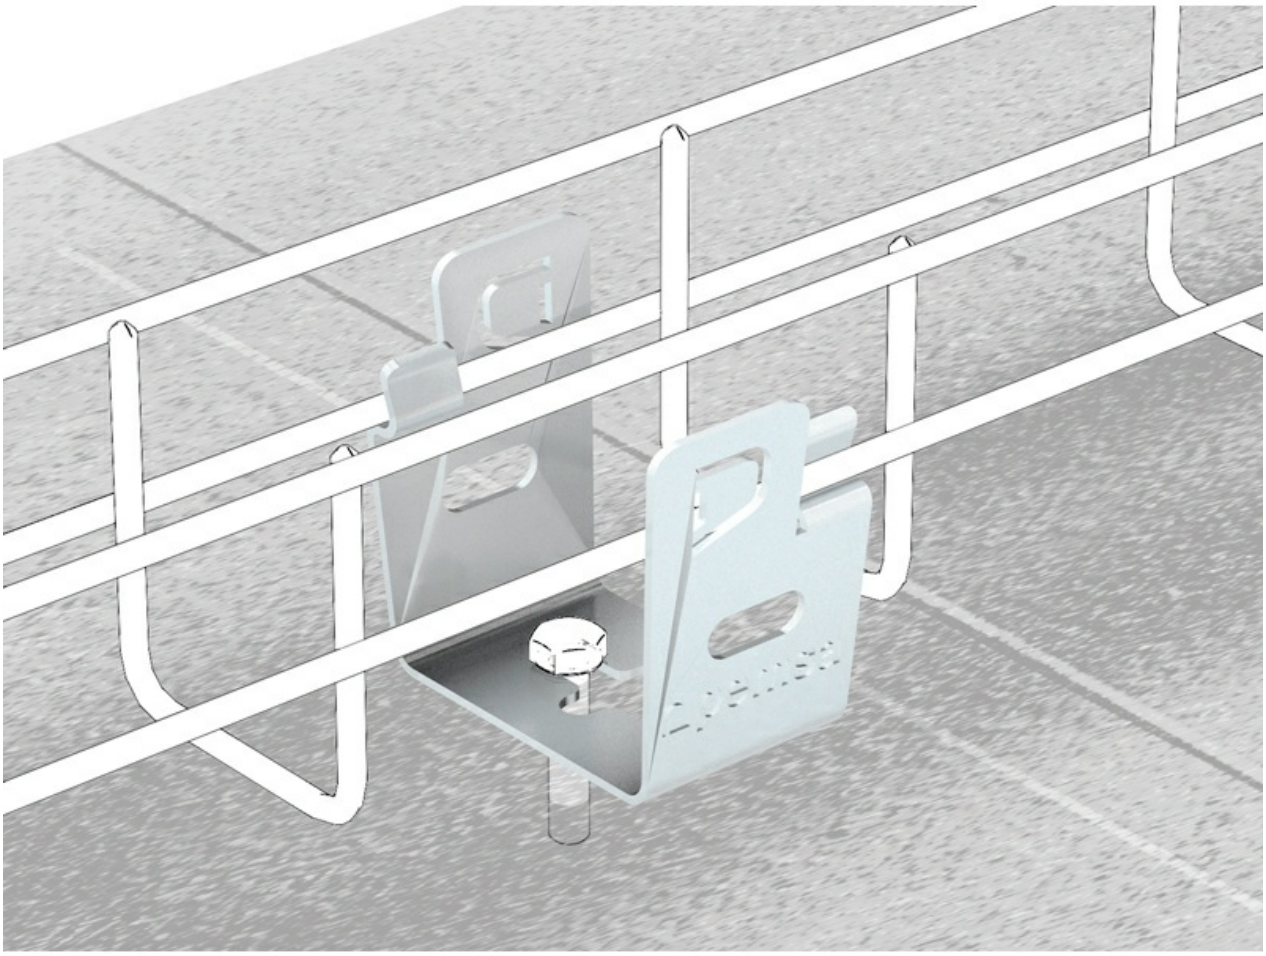

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."