

Solar Totem (Ref: 82003450)

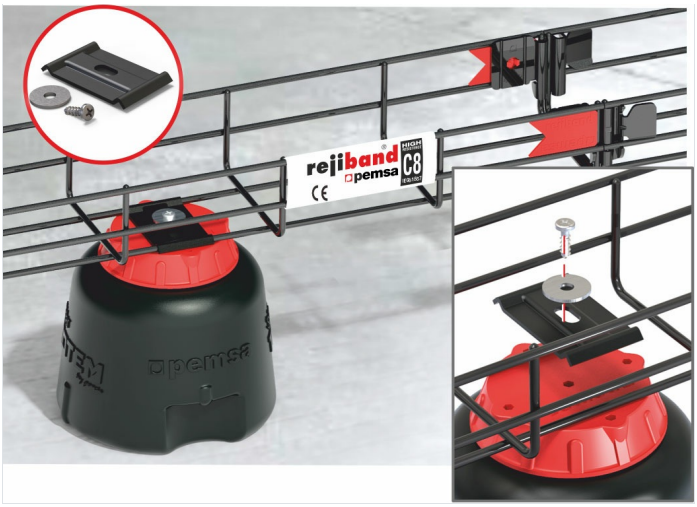

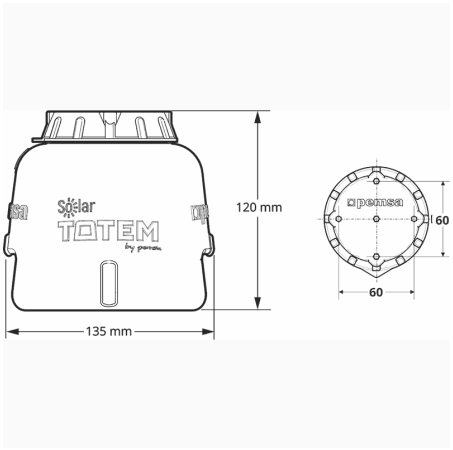

Description

Multifunctional raised mounting Support for Wire mesh tray and Cable tray installations and other functional assemblies for cable management in Solar Roof installations and other general applications on roofs. The system consists of a watertight container, closed by a threaded cap that guarantees its tightness while providing on its external part the necessary housings for fixing the different anchoring accessories for the cables trays or conduits to be installed. It is supplied in Kit format, including additional parts for fixing these cable management systems such as a Central Hanging plate with BK8 protection system, 2 units of the self-locking screw, and 2 units of flat washers in INOX protection system, I304 finish.

Advantages

Applications

The Solar Totem installation is suitable for: - Photovoltaic installations in flat solar roofs where drilling is not possible - Flat solar roofs on waterproof asphalt sheets - Solar roofs on concreted ground or with a gravel layer. - Intermediate point for the creation of a support point for installations with large spans or distances between supports. - Support and elevation of cable trays on the ground in industrial or tertiary facilities.

Solutions

RENEWABLE ENERGIES SERVICE AND RETAIL

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

Product data

ETIM 10	EC000022
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	
Colour	Black RAL 9005
kg/u	0,199
u	4
Material	POLIETILENO,POLIPROPILENO

SWL (kg)	100
Working temperature range (°C)	-15 / 90 °C
Fire resistance	A1 No combustible

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Load diagrams

Características técnicas *Technical features*		
	Altura *Height*	120 mm
Ø	Diámetro *Diameter*	135 mm
	Peso con relleno *Weight with filling*	900 gr
M	Material *Raw material*	Polipropileno y polietileno *Polypropylene & polyethylene*
CTA (kg)	Carga máxima *Maximun load*	100 kg
	Distancia entre soportes *Support span*	1 - 1,5m
UV	Resistente UV *UV resistant*	Alta *High*
°C ±	Temperatura de trabajo *Working temperature*	-15°C + 90°C

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Características técnicas
Technical features

	Altura *Height*	120 mm
Ø	Diámetro *Diameter*	135 mm
	Peso con relleno *Weight with filling*	900 gr
M	Material *Raw material*	Polipropileno y polietileno *Polypropylene & polyethylene*
CTA (kg)	Carga máxima *Maximun load*	100 kg
	Distancia entre soportes *Support span*	1 - 1,5m
UV	Resistente UV *UV resistant*	Alta *High*
°C ±	Temperatura de trabajo *Working temperature*	-15°C + 90°C

Product applications


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

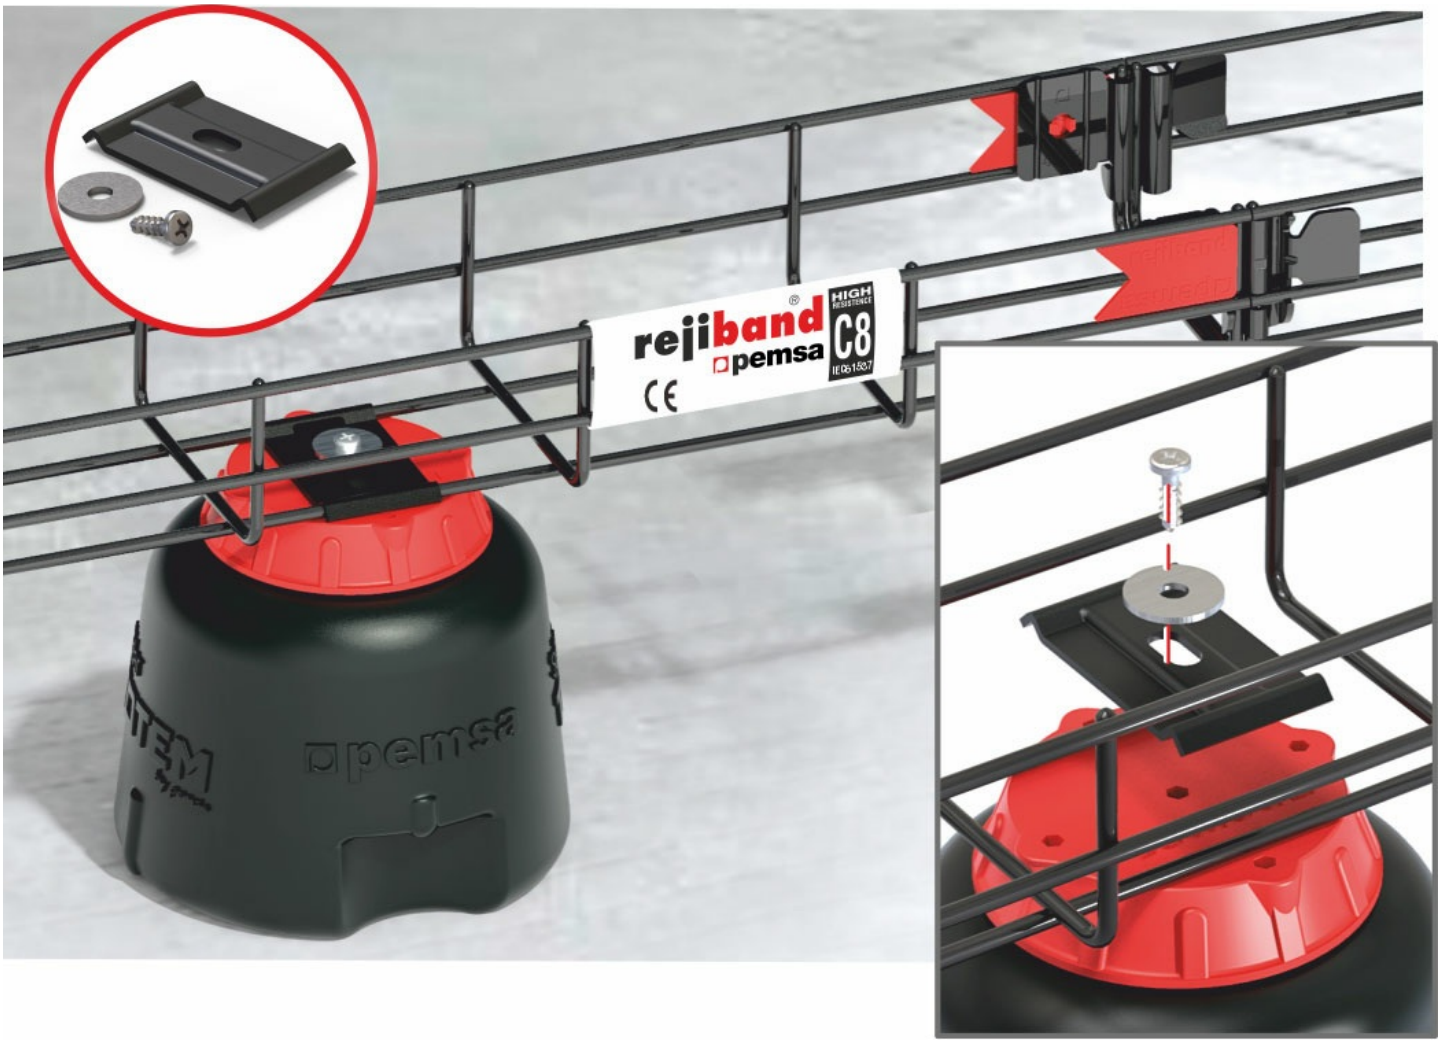


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

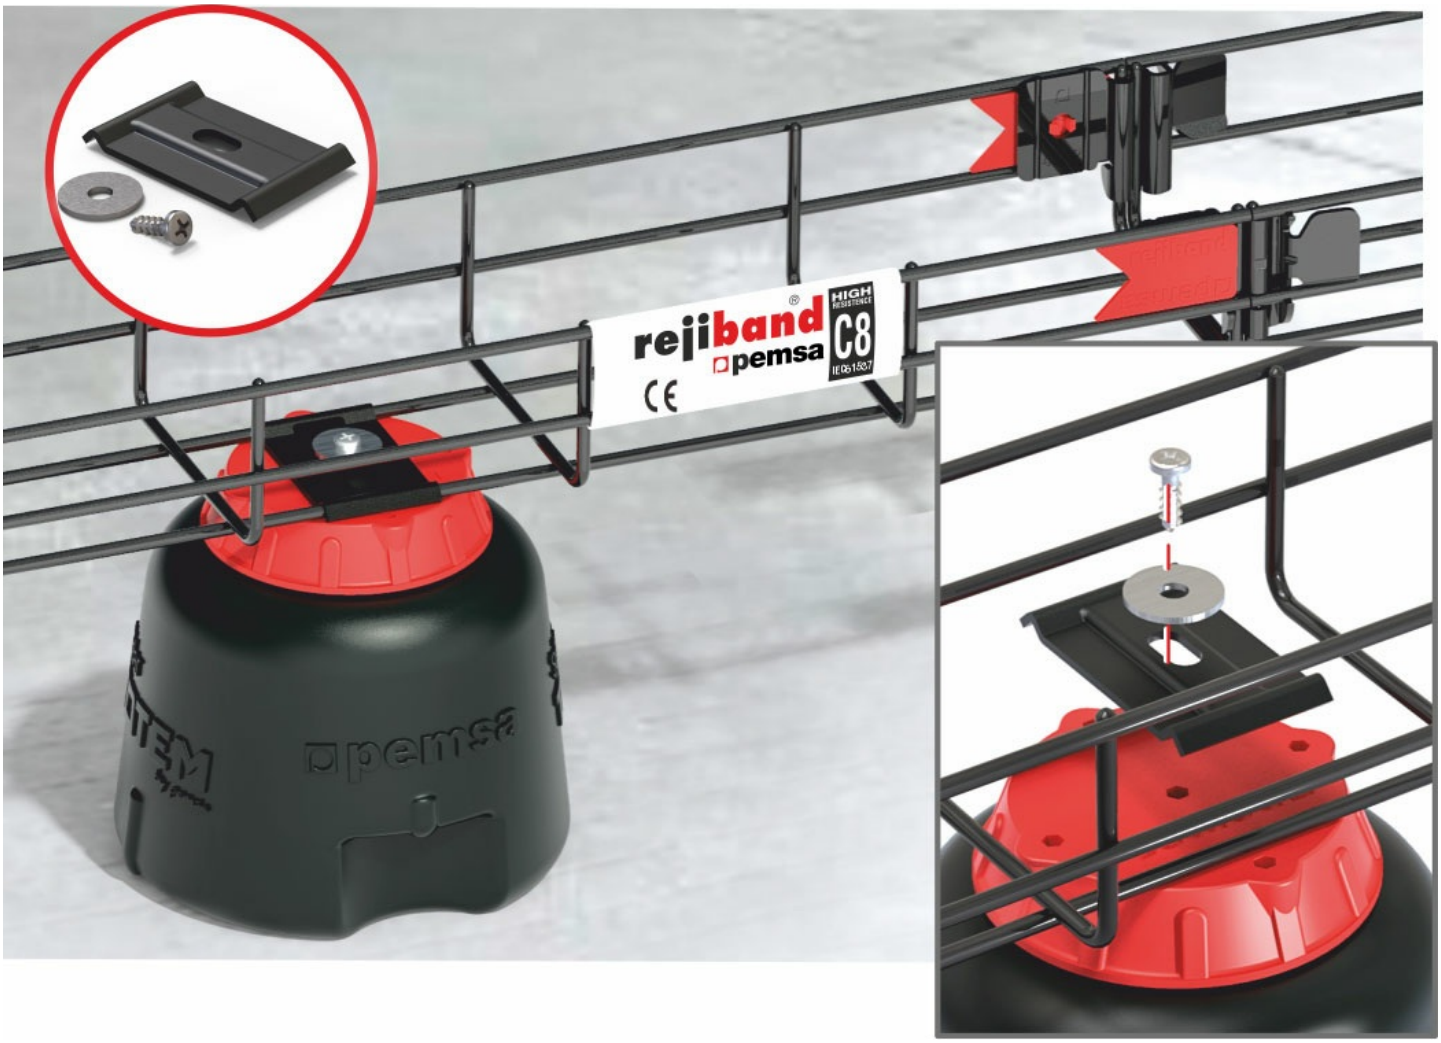


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

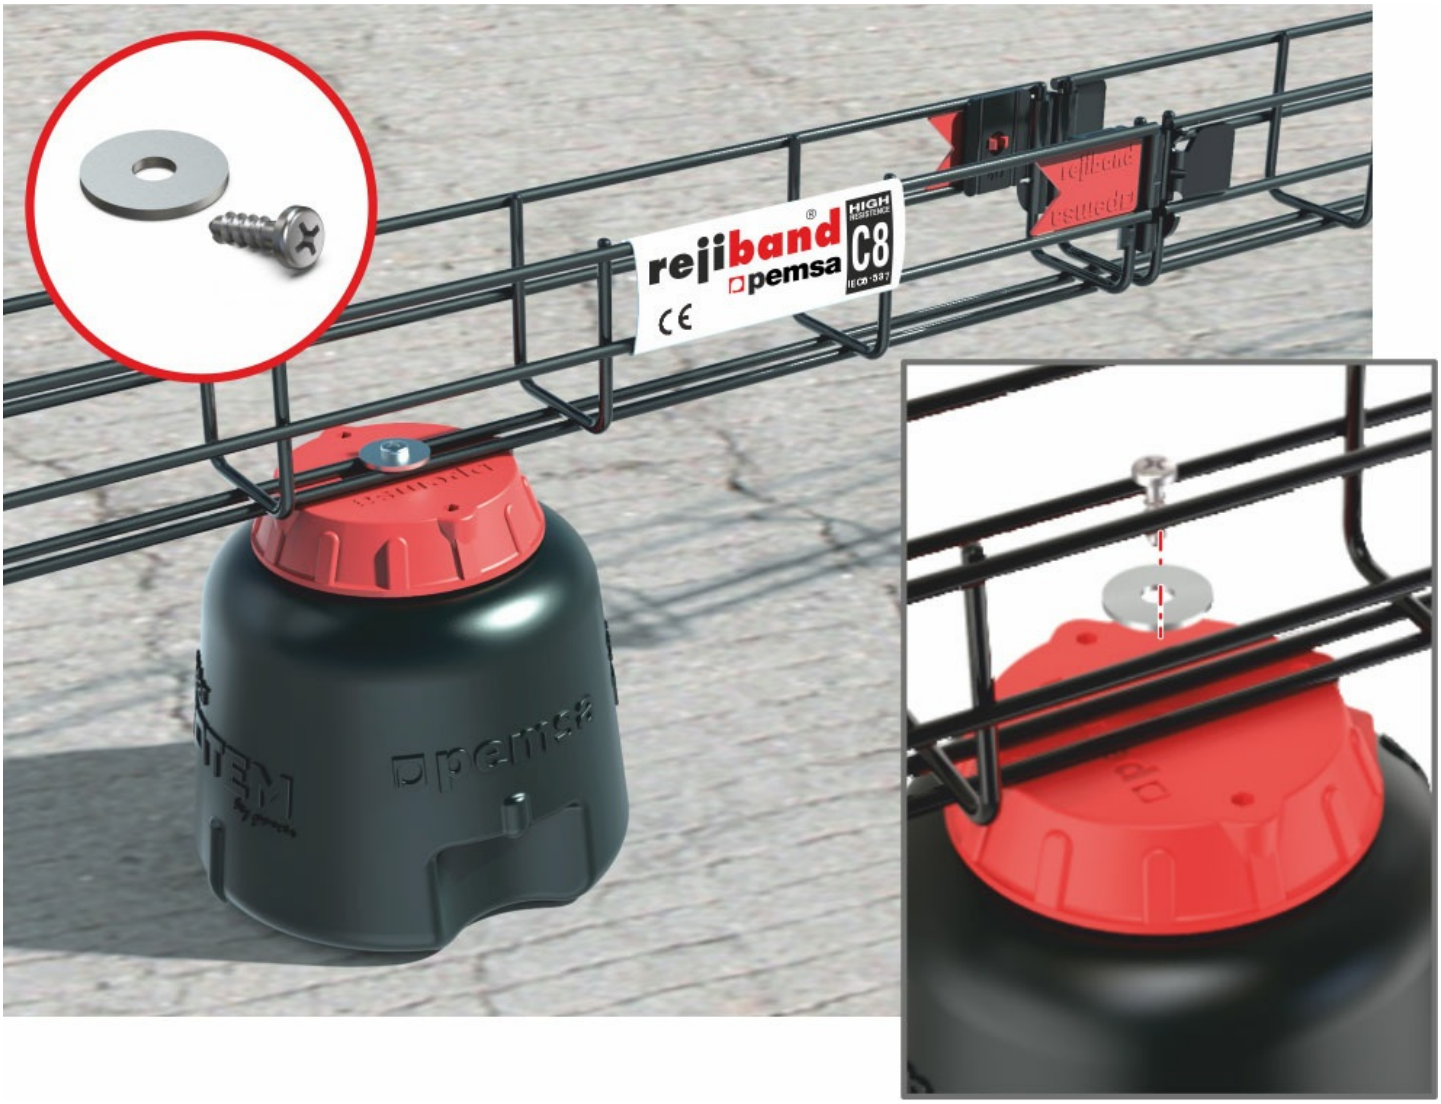

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

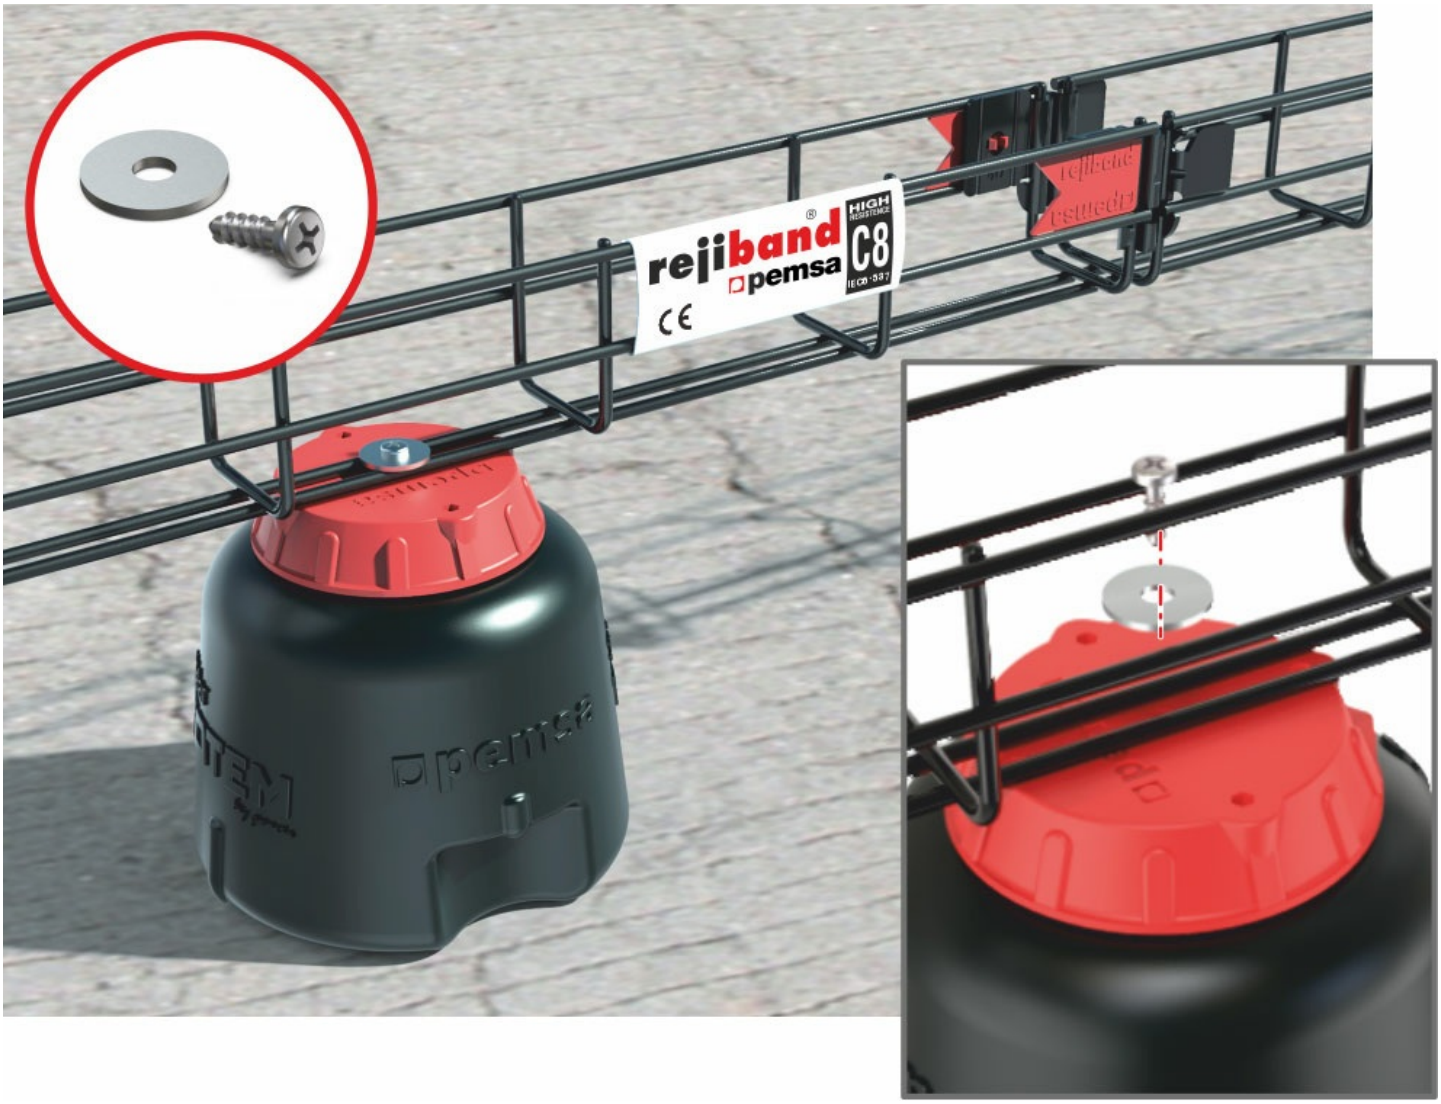

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Solar Totem (Ref: 82003450)



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Solar Totem (Ref: 82003450)

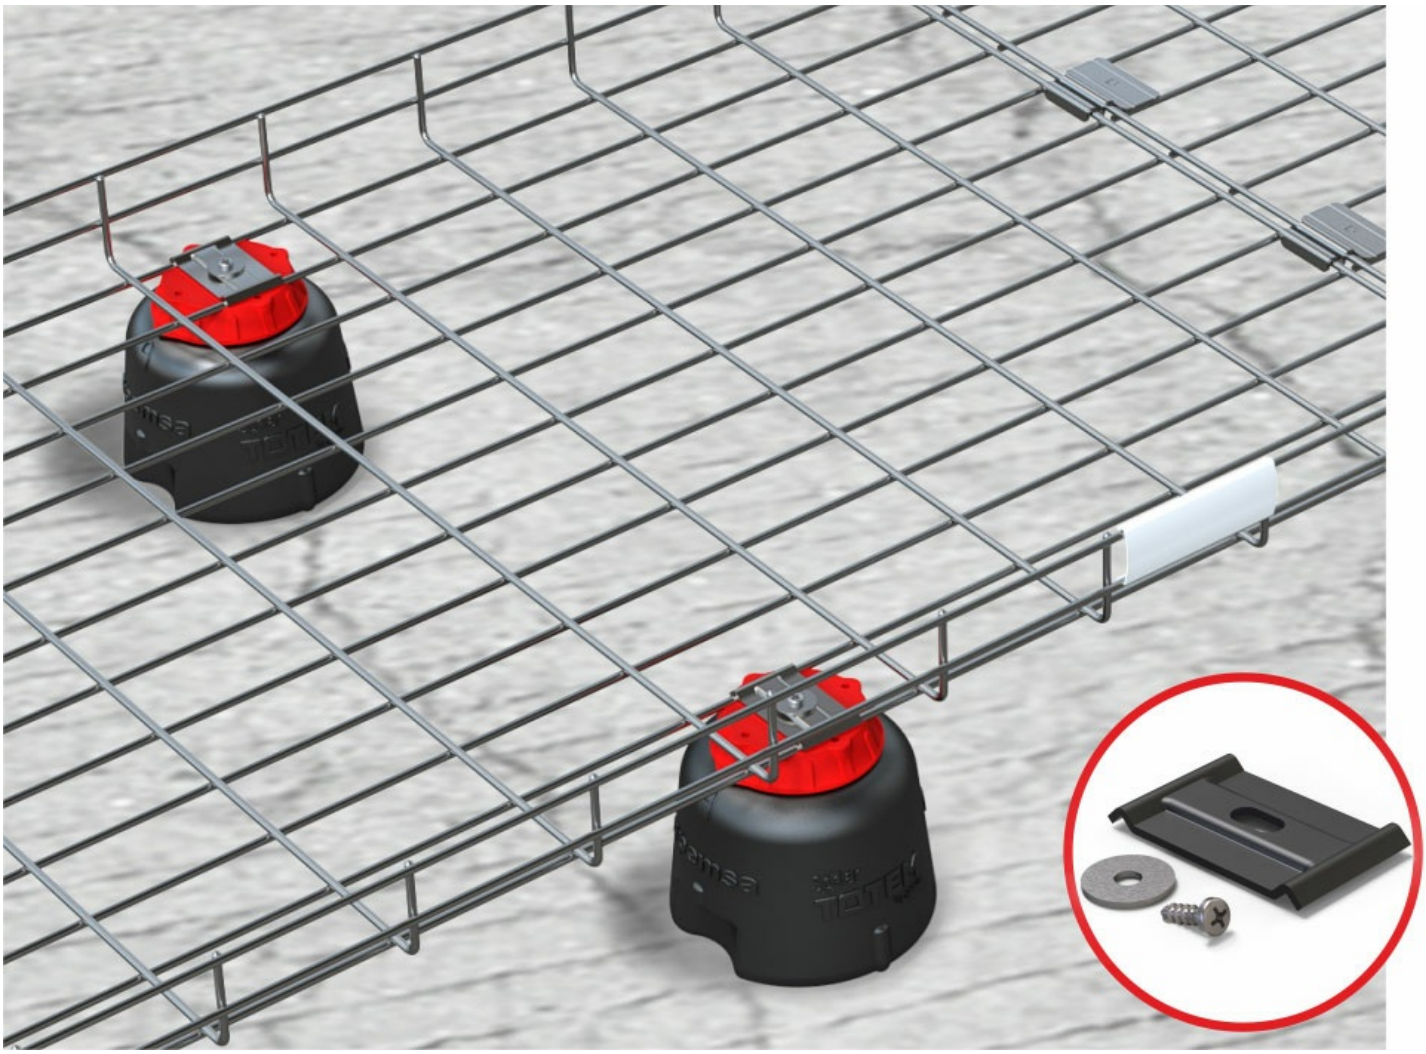

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Solar Totem (Ref: 82003450)

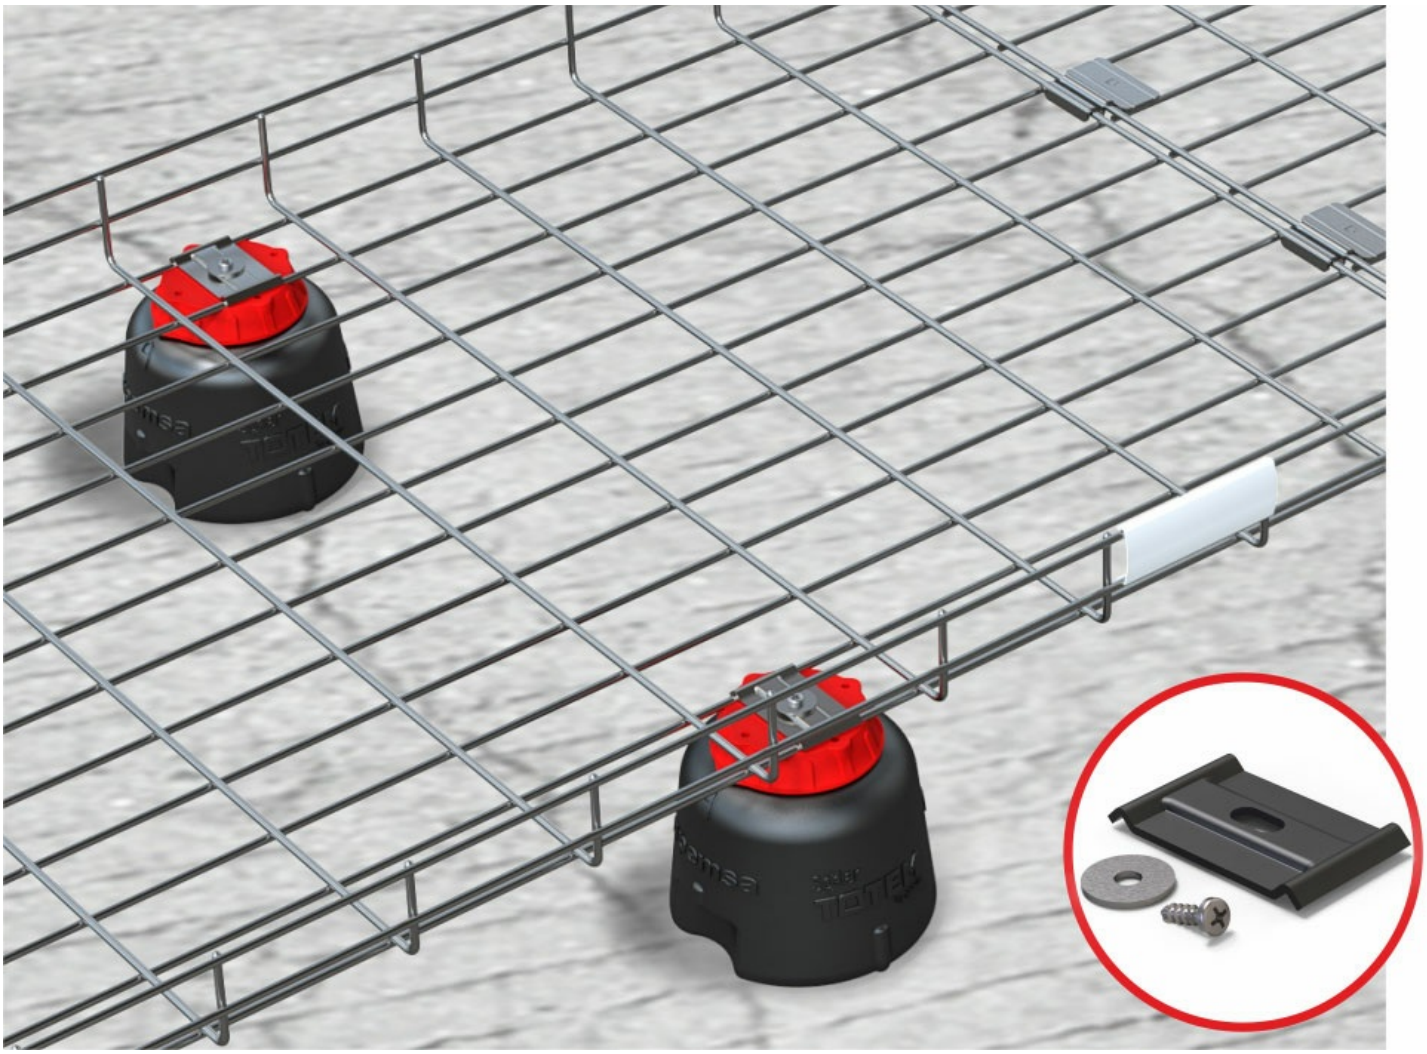

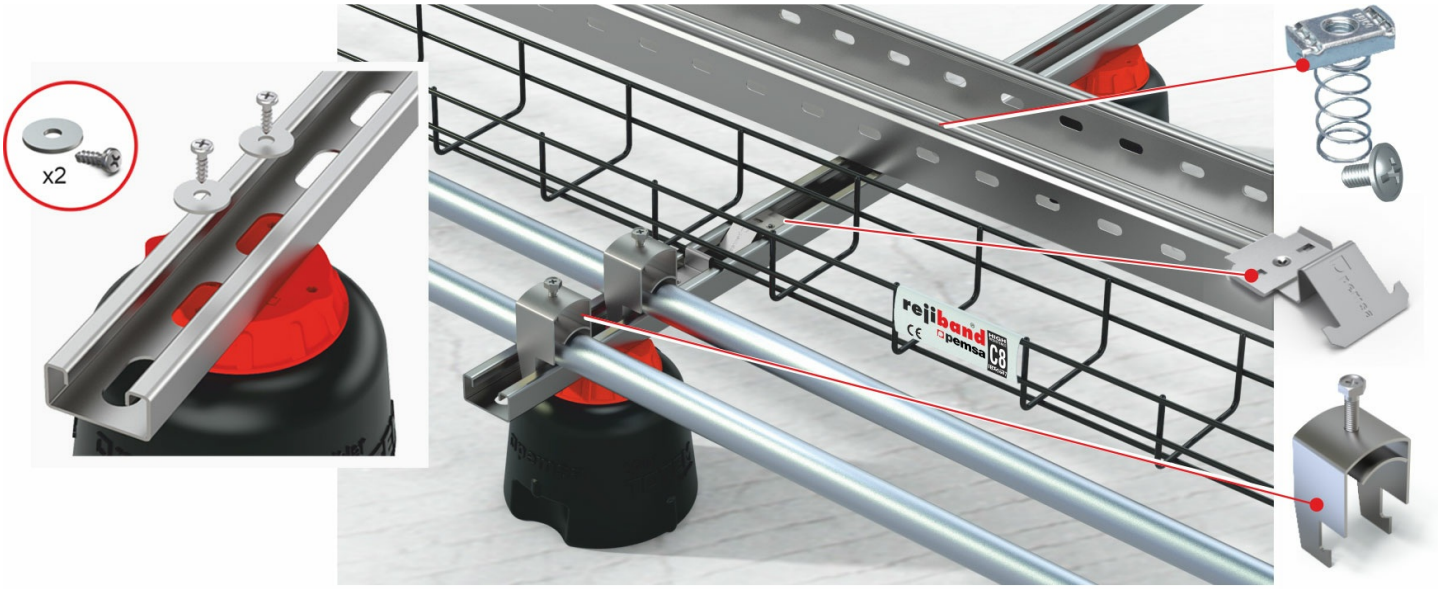

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Solar Totem (Ref: 82003450)

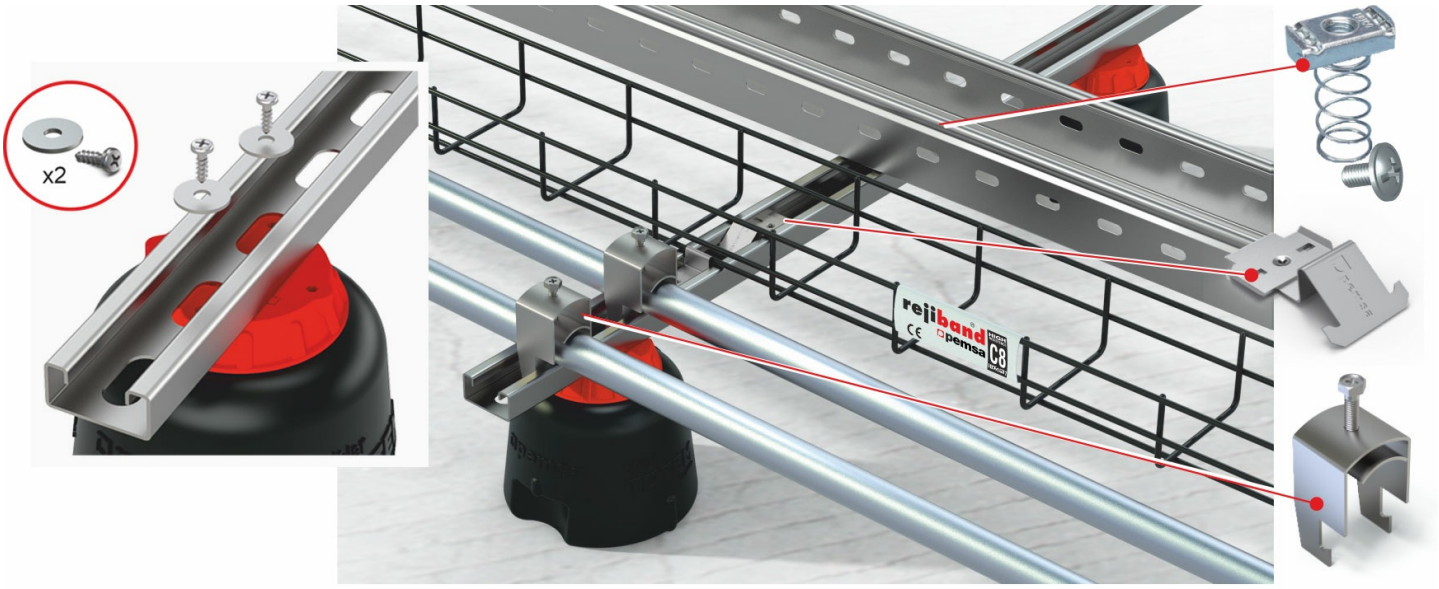

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."