


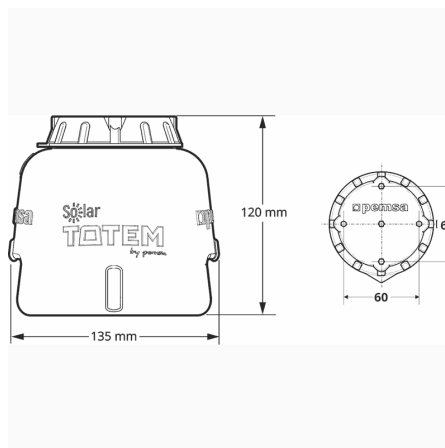

Description

Multifunctional raised mounting Support for Wire mesh tray and Cable tray installations and other functional assemblies for cable management in Solar Roof installations and other general applications on roofs. The system consists of a watertight container, closed by a threaded cap that guarantees its tightness while providing on its external part the necessary housings for fixing the different anchoring accessories for the cables trays or conduits to be installed. It is supplied in Kit format, including additional parts for fixing these cable management systems such as a Central Hanging plate with BK8 protection system, 2 units of the self-locking screw, and 2 units of flat washers in INOX protection system, I304 finish.

Advantages

Applications

The Solar Totem installation is suitable for: - Photovoltaic installations in flat solar roofs where drilling is not possible - Flat solar roofs on waterproof asphalt sheets - Solar roofs on concreted ground or with a gravel layer. - Intermediate point for the creation of a support point for installations with large spans or distances between supports. - Support and elevation of cable trays on the ground in industrial or tertiary facilities.

Solutions



RENEWABLE ENERGIES SERVICE AND RETAIL



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000022	
Huelva de CO2. GWP A1-A3 (kg CO2 eq.)		Working temperature range (°C)	
Colour		Fire resistance	
kg/u		A1 No combustible	
u			
Material			

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Load diagrams

Características técnicas		
Technical features		
	Altura <i>Height</i>	120 mm
	Diámetro <i>Diameter</i>	135 mm
	Peso con relleno <i>Weight with filling</i>	900 gr
	Material <i>Raw material</i>	Polipropileno y polietileno <i>Polypropylene & polyethylene</i>
	Carga máxima <i>Maximun load</i>	100 kg
	Distancia entre soportes <i>Support span</i>	1 - 1,5m
	Resistente UV <i>UV resistant</i>	Alta <i>High</i>
	Temperatura de trabajo <i>Working temperature</i>	-15°C + 90°C



Características técnicas

Technical features

	Altura <i>Height</i>	120 mm
	Diámetro <i>Diameter</i>	135 mm
	Peso con relleno <i>Weight with filling</i>	900 gr
	Material <i>Raw material</i>	Polipropileno y polietileno <i>Polypropylene & polyethylene</i>
	Carga máxima <i>Maximun load</i>	100 kg
	Distancia entre soportes <i>Support span</i>	1 - 1,5m
	Resistente UV <i>UV resistant</i>	Alta <i>High</i>
	Temperatura de trabajo <i>Working temperature</i>	-15°C + 90°C

Product applications



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."





