


Metatray Vertical Wall Bracket

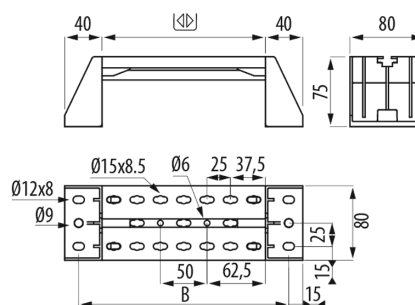

Description

Advantages

Applications

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 Colour	Grey RAL 7035		100, 150, 200, 300, 400, 500, 600		4		6 J		-20 / 60 °C		GRADO UL94: V0
	Resistant acc. to UL568		ETIM 10 EC000022								

Product data

	Ref	kg/u
100	82003674	0,231
150	82003675	0,259
200	82003676	0,288
300	82003677	0,362
400	82003678	0,419
500	82003679	0,482
600	82003680	0,539

 Protection System


- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Metatray Vertical Wall Bracket

Product applications

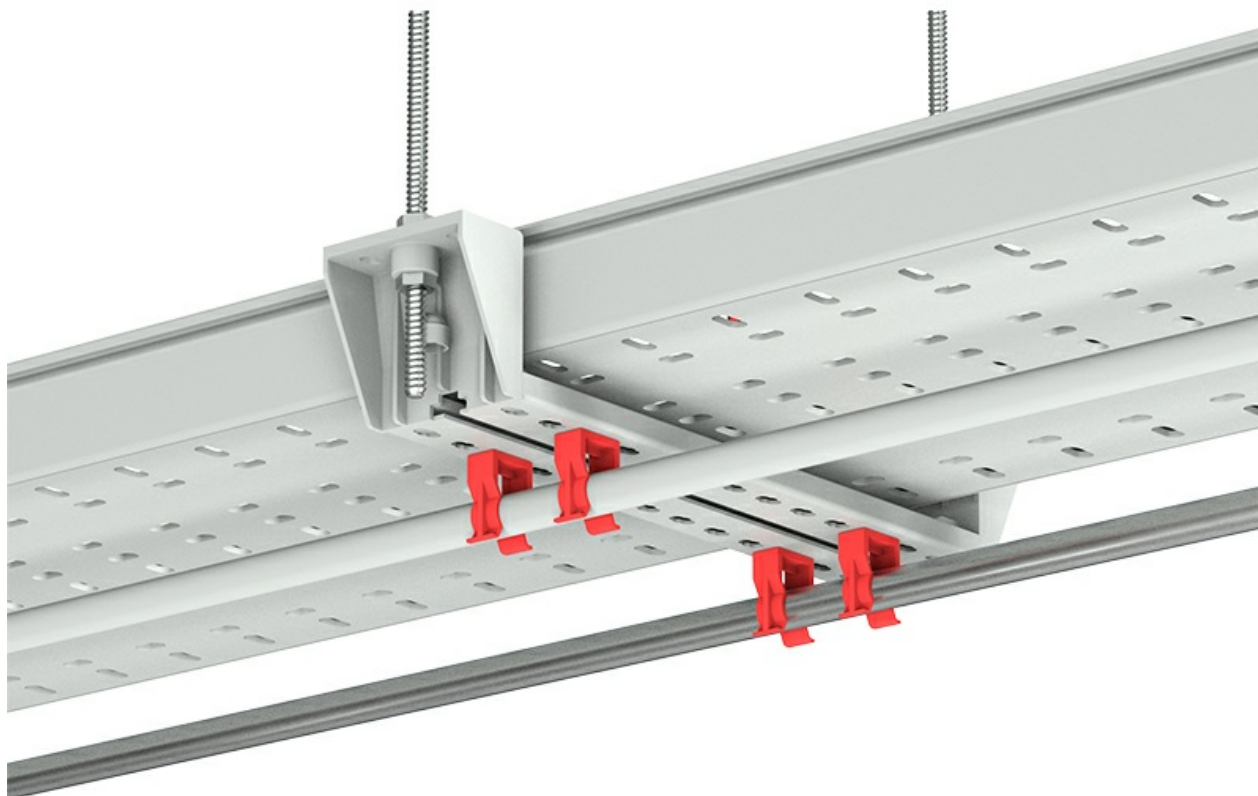

Metatray Vertical Wall Bracket



Metatray Vertical Wall Bracket

