
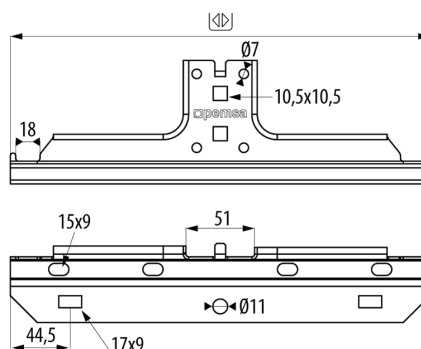


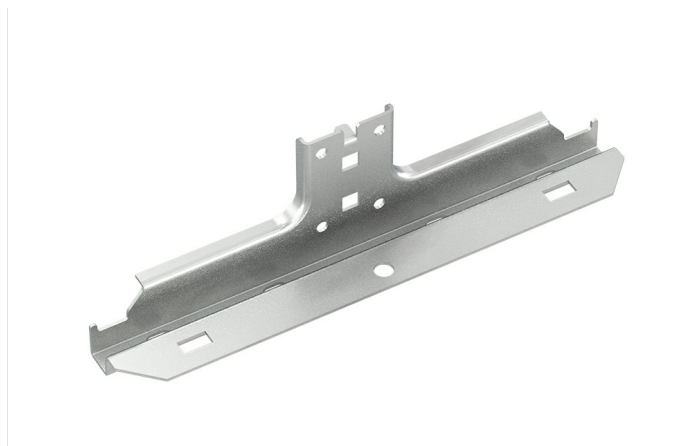

Description

Width 300 mm, With PG protection system

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Ceiling fixing using 41x41 and 41x21 channels in the central part of the cable ladder, making it easier to lay and install cables thanks to the sides of the cable ladder are free.

Load values according to international standard IEC 61537.

Applications

Suitable for supporting medium loads in ceiling-mounted cable ladders for electrical and/or telecommunications installations in: Civil works, tunnels, car parks, public buildings, shopping centres, large infrastructures such as: Airports, metro and train lines, and in the tertiary sector and industrial applications such as naval, textile, chemical and food, depending on the protection system.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001003	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,613	Material	Steel with surface coating
Protection System	PG	Working temperature range (°C)	-50 / 150 °C
Finish	PG3, Pregalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Width (mm)	300		
kg/u	0,499		

🔒 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

🏠 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



Product applications

