
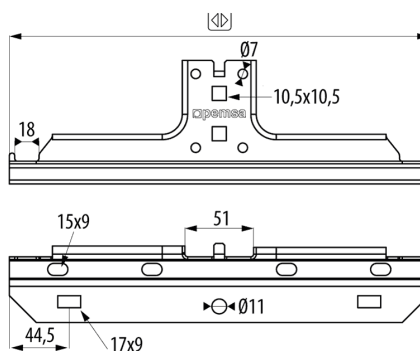


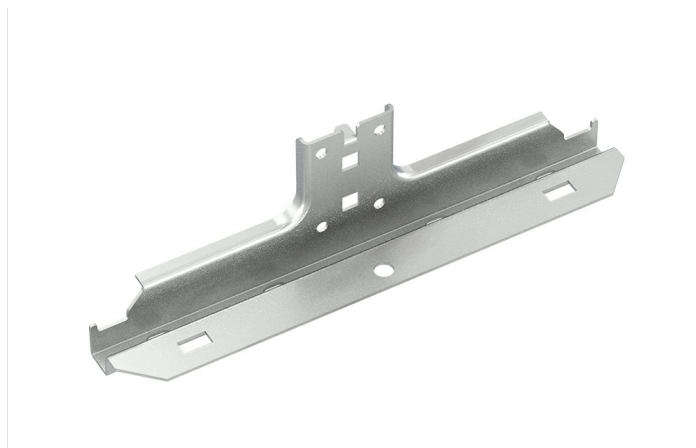

Description

Width 400 mm, With PG protection system

Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Ceiling fixing using 41x41 and 41x21 channels in the central part of the cable ladder, making it easier to lay and install cables thanks to the sides of the cable ladder are free.

Load values according to international standard IEC 61537.

Applications

Suitable for supporting medium loads in ceiling-mounted cable ladders for electrical and/or telecommunications installations in: Civil works, tunnels, car parks, public buildings, shopping centres, large infrastructures such as: Airports, metro and train lines, and in the tertiary sector and industrial applications such as naval, textile, chemical and food, depending on the protection system.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC001003	u	4
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	2,116	Material	Steel with surface coating
Protection System	PG	Working temperature range (°C)	-50 / 150 °C
Finish	PG3, Pregalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Width (mm)	400		
kg/u	0,655		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

