
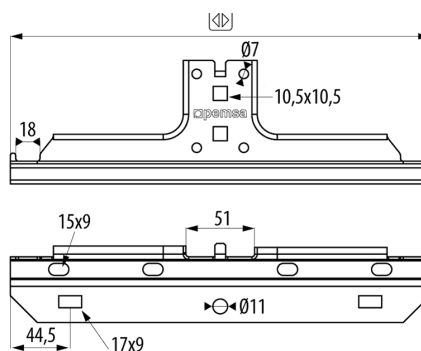


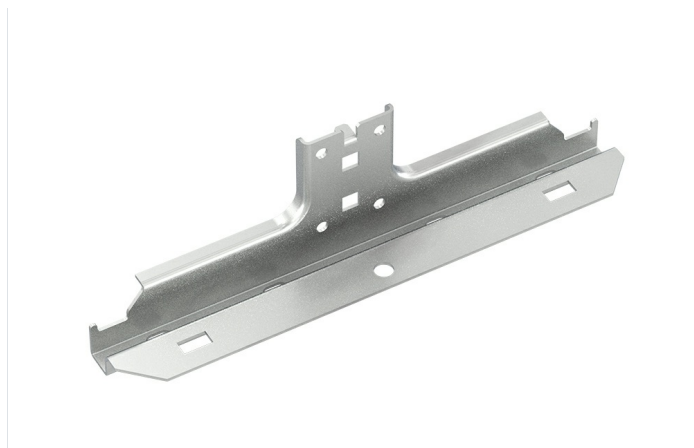

### Description

Width 200 mm, With PG protection system

### Advantages

Available in protection systems: PG, pre-galvanized and GC, hot-dip galvanized

Ceiling fixing using 41x41 and 41x21 channels in the central part of the cable ladder, making it easier to lay and install cables thanks to the sides of the cable ladder are free.

Load values according to international standard IEC 61537.

### Applications

Suitable for supporting medium loads in ceiling-mounted cable ladders for electrical and/or telecommunications installations in: Civil works, tunnels, car parks, public buildings, shopping centres, large infrastructures such as: Airports, metro and train lines, and in the tertiary sector and industrial applications such as naval, textile, chemical and food, depending on the protection system.

### Solutions



Product data

|                                       |                    |                                |                            |
|---------------------------------------|--------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001003           | u                              | 4                          |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 1,117              | Material                       | Steel with surface coating |
| Protection System                     | PG                 | Working temperature range (°C) | -50 / 150 °C               |
| Finish                                | PG3, Pregalvanised | Fire resistance                | A1 No combustible          |
| Resistance Class                      | Class 3            |                                |                            |
| Width (mm)                            | 200                |                                |                            |
| kg/u                                  | 0,346              |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

## Product applications

