


Suspension hanger (Ref: 81000019)

1/3

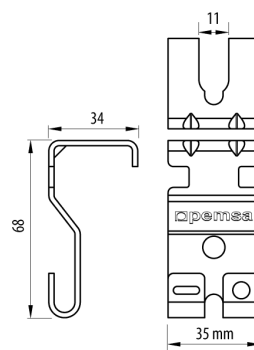

Description

Side suspension support for ceiling installation of Rejiband® mesh tray with threaded rods. It can be used with heights of 35, 60 and 100mm and widths from 100 to 600mm. This product has quick installation and does not require screws for connection to the system. Made from steel, available in various protection systems. With PG protection system

Advantages

Good load capacity. Up to 100 kg per point for the 2-piece / 2- threaded rod set.

CE certified in compliance with the low voltage directive 2014/35 / EU and international product standard IEC 61537

Available in PG, BK8 and GC protection systems

It allows its disassembly in a simple way to facilitate the laying of the cables.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Applications

Suitable for supporting medium loads on ceiling-mounted cable trays with 1 or 2 rods for Rejiband® trays for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC000896	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
kg/u		0,058	
u		18	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

□ □



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

