
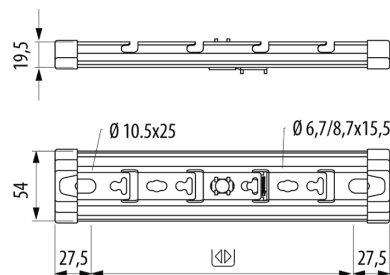


Omega SPLUS Suspension

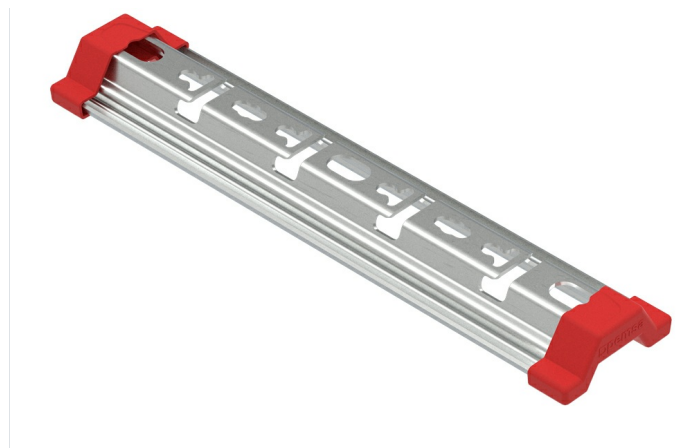

Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted to the ceiling with threaded rod. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various Protection Systems.

Advantages

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

Installation with a single central threaded rod up to 300 width, allows the introduction of cables from the side.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Applications

Suitable for supporting medium loads of cable trays to the ceiling with 1 or 2 threaded rods for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 100, 150, 200, 300, 400, 500, 600	 10	 -50 / 150 °C	ETIM 10 EC001003
---	--	--	---------------------

Product data

			Ref	kg/u			
PG	Class 3	100	63022104	0,120	Steel with surface coating	160	E90 (90 min. 1000°C)
PG	Class 3	150	63022154	0,165	Steel with surface coating	160	E90 (90 min. 1000°C)
PG	Class 3	200	63022204	0,197	Steel with surface coating	160	E90 (90 min. 1000°C)
PG	Class 3	300	63022304	0,274	Steel with surface coating	160	E90 (90 min. 1000°C)
PG	Class 3	400	63022404	0,351	Steel with surface coating	390	E90 (90 min. 1000°C)
PG	Class 3	500	63022504	0,427	Steel with surface coating	390	E90 (90 min. 1000°C)
PG	Class 3	600	63022604	0,503	Steel with surface coating	390	E90 (90 min. 1000°C)
AZ+	Class 8	100	63032104	0,120	Steel with surface coating	160	A1 No combustible
AZ+	Class 8	150	63032154	0,165	Steel with surface coating	160	A1 No combustible
AZ+	Class 8	200	63032204	0,197	Steel with surface coating	160	A1 No combustible
AZ+	Class 8	300	63032304	0,274	Steel with surface coating	160	A1 No combustible
AZ+	Class 8	400	63032404	0,351	Steel with surface coating	390	A1 No combustible
AZ+	Class 8	500	63032504	0,427	Steel with surface coating	390	A1 No combustible
AZ+	Class 8	600	63032604	0,503	Steel with surface coating	390	A1 No combustible
INOX	Class 9C	100	63052104	0,120	Stainless steel AISI 304	160	E90 (90 min. 1000°C)
INOX	Class 9C	150	63052154	0,165	Stainless steel AISI 304	160	E90 (90 min. 1000°C)
INOX	Class 9C	200	63052204	0,197	Stainless steel AISI 304	160	E90 (90 min. 1000°C)
INOX	Class 9C	300	63052304	0,274	Stainless steel AISI 304	160	E90 (90 min. 1000°C)
INOX	Class 9C	400	63052404	0,351	Stainless steel AISI 304	390	E90 (90 min. 1000°C)
INOX	Class 9C	500	63052504	0,427	Stainless steel AISI 304	390	E90 (90 min. 1000°C)
INOX	Class 9C	600	63052604	0,503	Stainless steel AISI 304	390	E90 (90 min. 1000°C)
INOX	Class 9D	100	63062104	0,120	Acero inoxidable AISI 316L	160	E90 (90 min. 1000°C)
INOX	Class 9D	150	63062154	0,165	Acero inoxidable AISI 316L	160	E90 (90 min. 1000°C)
INOX	Class 9D	200	63062204	0,197	Acero inoxidable AISI 316L	160	E90 (90 min. 1000°C)
INOX	Class 9D	300	63062304	0,274	Acero inoxidable AISI 316L	160	E90 (90 min. 1000°C)
INOX	Class 9D	400	63062404	0,351	Acero inoxidable AISI 316L	390	E90 (90 min. 1000°C)
INOX	Class 9D	500	63062504	0,427	Acero inoxidable AISI 316L	390	E90 (90 min. 1000°C)
INOX	Class 9D	600	63062604	0,503	Acero inoxidable AISI 316L	390	E90 (90 min. 1000°C)
BK8	Class 8	100	63082104	0,123	Steel with surface coating	160	E90 (90 min. 1000°C)
BK8	Class 8	150	63082154	0,168	Steel with surface coating	160	E90 (90 min. 1000°C)
BK8	Class 8	200	63082204	0,202	Steel with surface coating	160	E90 (90 min. 1000°C)
BK8	Class 8	300	63082304	0,279	Steel with surface coating	160	E90 (90 min. 1000°C)
BK8	Class 8	400	63082404	0,358	Steel with surface coating	390	E90 (90 min. 1000°C)
BK8	Class 8	500	63082504	0,436	Steel with surface coating	390	E90 (90 min. 1000°C)
BK8	Class 8	600	63082604	0,514	Steel with surface coating	390	E90 (90 min. 1000°C)

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass


 Insulating materials


- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Omega SPLUS Suspension


4/7

Product applications

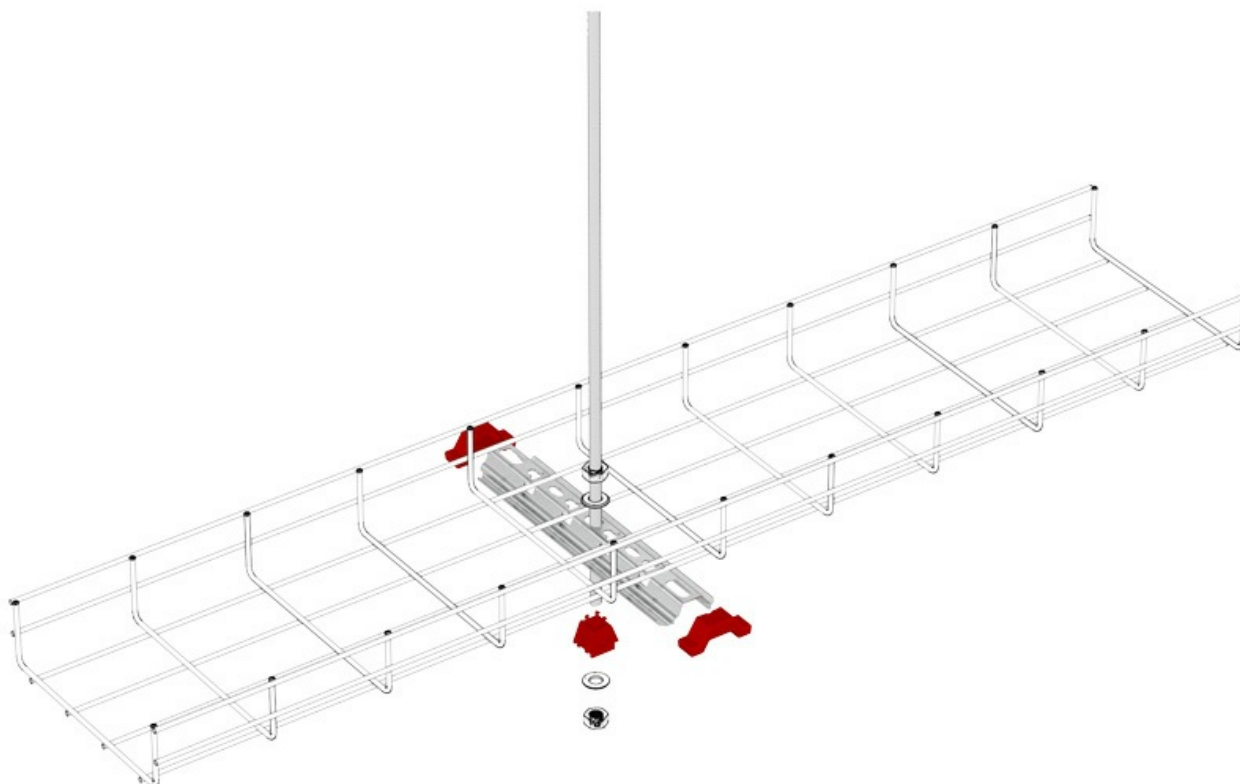

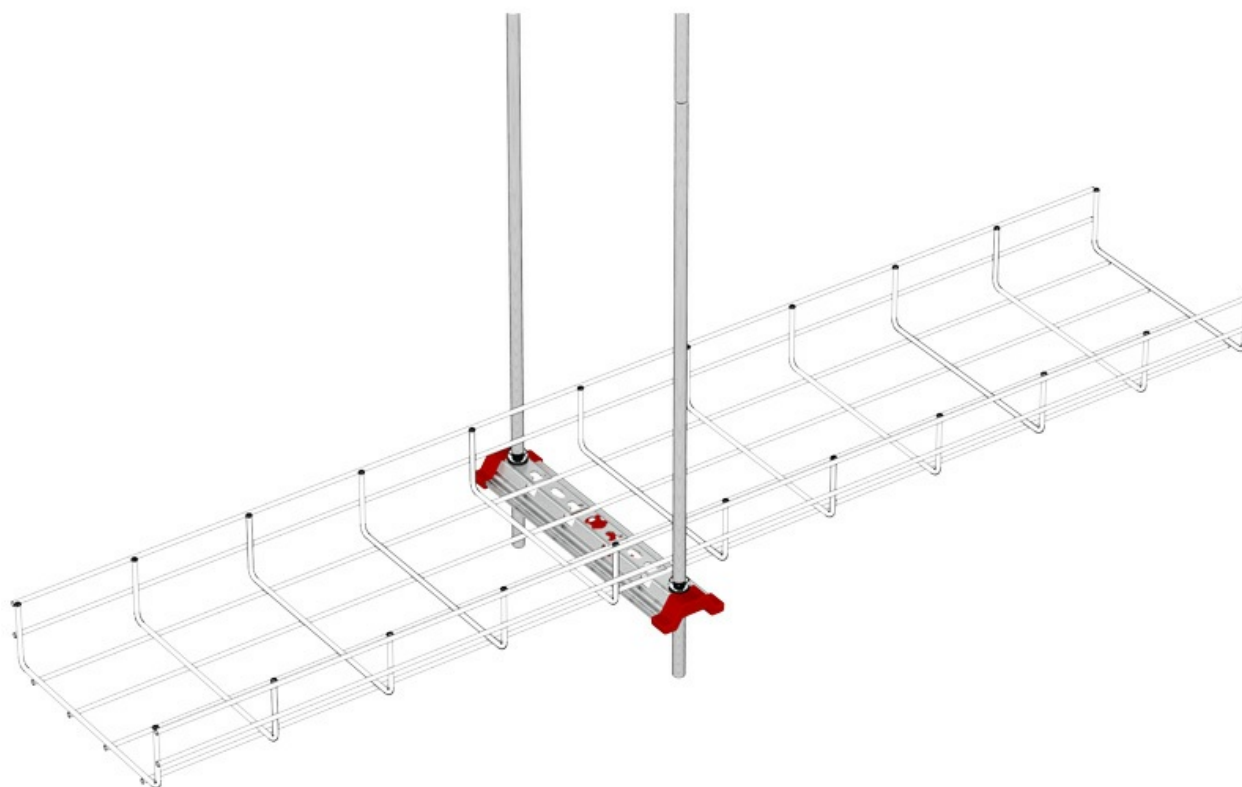

Omega SPLUS Suspension

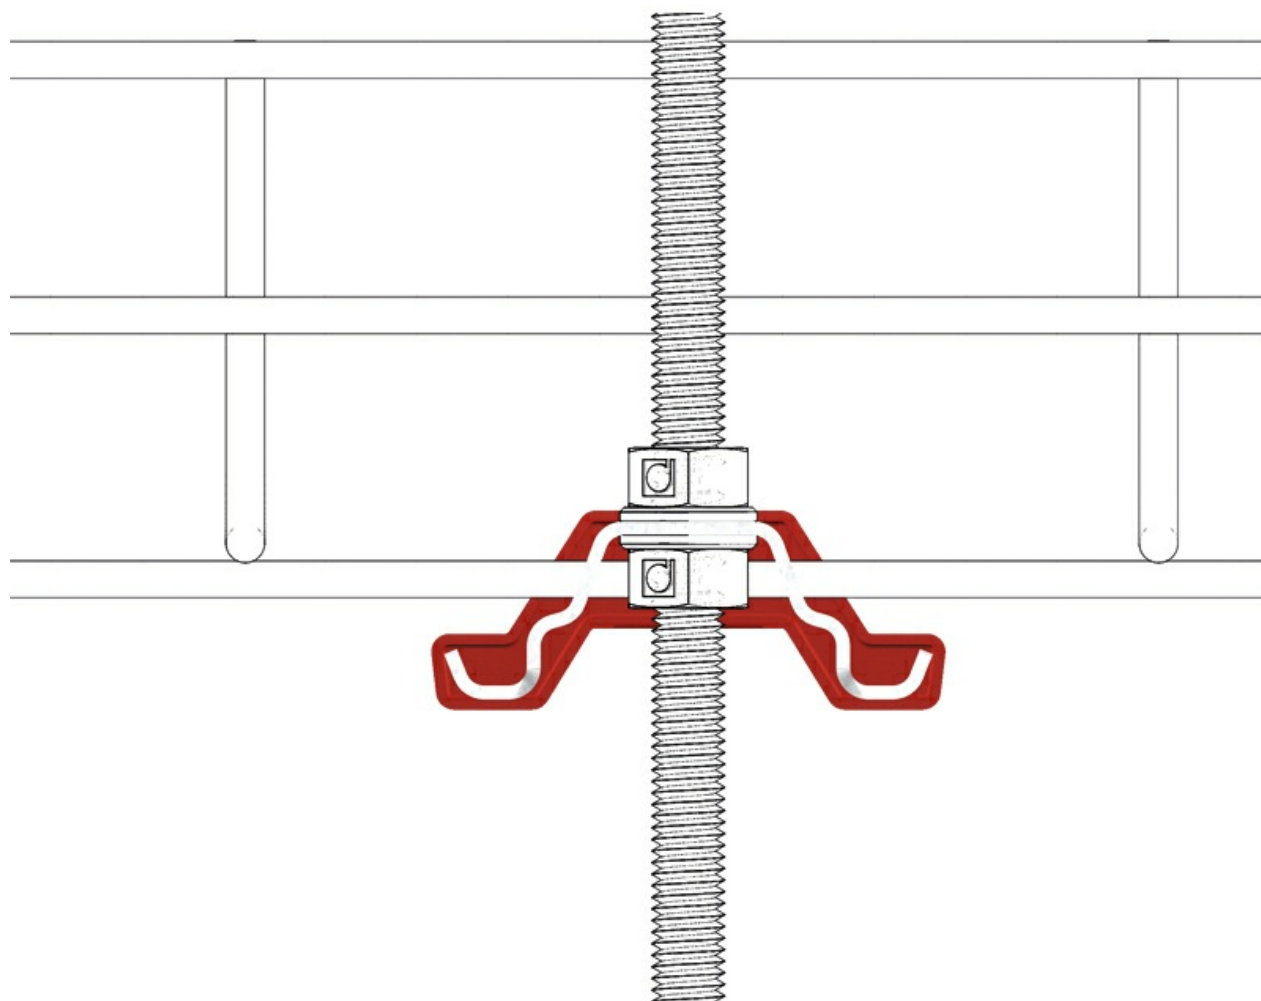

Omega SPLUS Suspension

