
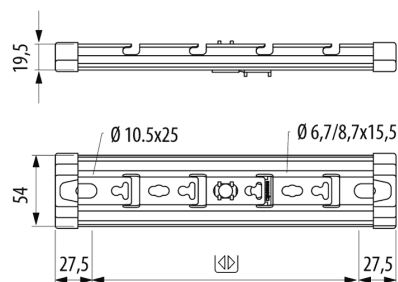


Omega SPLUS Suspension (Ref: 63032104)

1/6

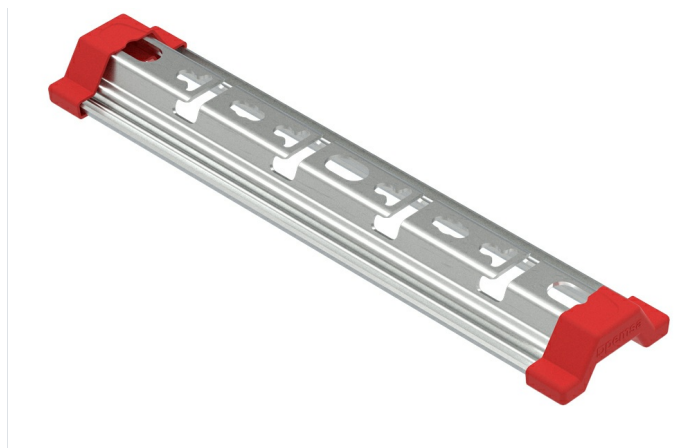

Description

Support with omega profile and universal connection system 100 mm for Rejiband® and Pemsaband® trays mounted to the ceiling with threaded rod. Click fixing system. Made of steel.

Advantages

Applications

Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



ETIM 10	EC001003	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,389	Material	Steel with surface coating
Protection System	AZ+	SWL (kg)	160
Finish	ZM High Resistance Alloy	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
Width (mm)	100		
kg/u	0,120		

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

