
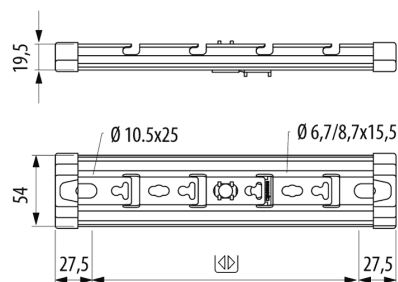


Omega SPLUS Suspension (Ref: 63032404)

1/6

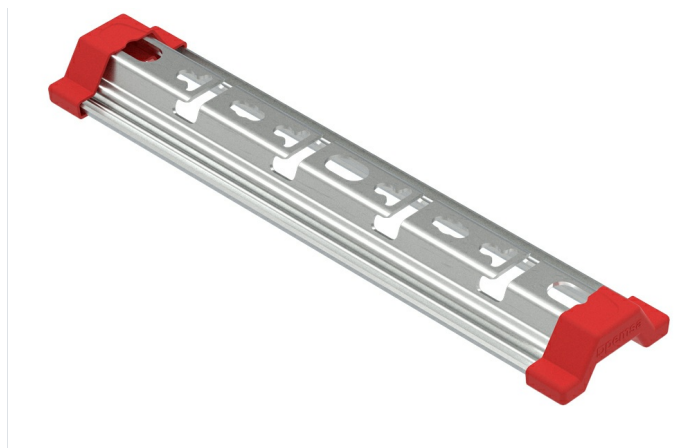

Description

Support with omega profile and universal connection system 400 mm for Rejiband® and Pemsaband® trays mounted to the ceiling with threaded rod. Click fixing system. Made of steel.

Advantages

Applications

Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC001003	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,132	Material	Steel with surface coating
Protection System	AZ+	SWL (kg)	390
Finish	ZM High Resistance Alloy	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
Width (mm)	400		
kg/u	0,351		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



Product applications

