
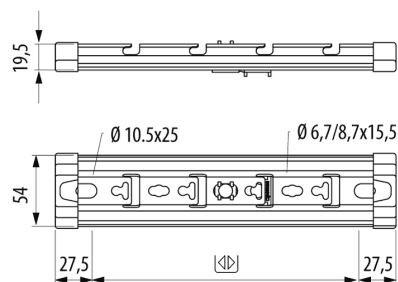


# Omega SPLUS Suspension ( Ref: 63032504 )

1/6

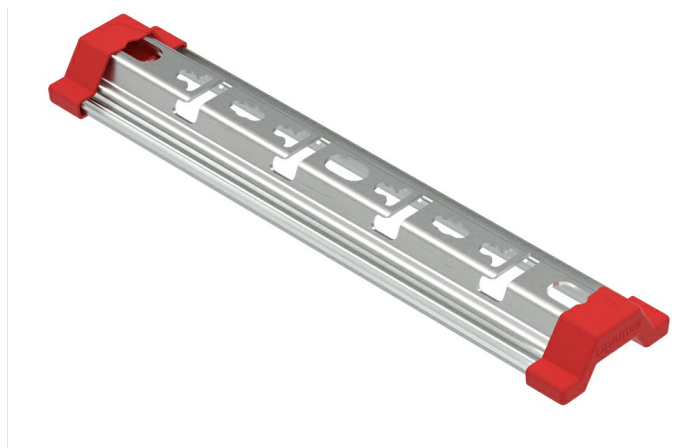

## Description

Support with omega profile and universal connection system 500 mm for Rejiband® and Pemsaband® trays mounted to the ceiling with threaded rod. Click fixing system. Made of steel.

## Advantages

## Applications

## Solutions



RENEWABLE ENERGIES DATA CENTERS SERVICE AND RETAIL FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |                          |                                |                            |
|---------------------------------------|--------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001003                 | u                              | 10                         |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 1,379                    | Material                       | Steel with surface coating |
| Protection System                     | AZ+                      | SWL (kg)                       | 390                        |
| Finish                                | ZM High Resistance Alloy | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 8                  | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 500                      |                                |                            |
| kg/u                                  | 0,427                    |                                |                            |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧊 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications



