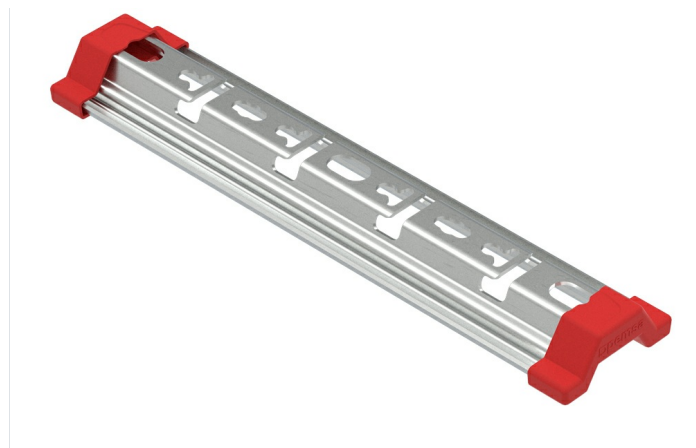


### Description

Support with omega profile and universal connection system for Rejiband® and Pemsaband® trays mounted to the ceiling with threaded rod. Width 100 mm, With INOX protection system, I316L finish. Click fixing system. Made of steel and available for widths of 100, 150, 200, 300 and 400 mm and in various Protection Systems.

### Advantages

Available in several protection systems: PG, GC, BK8 and stainless steel AISI 304 and AISI 316L.

Installation with a single central threaded rod up to 300 width, allows the introduction of cables from the side.

N Mark of Aenor, in accordance with IEC 61537 and CE conformity to Directive 2014/35 / EU. Fire resistance E90 according to DIN 4102-12.

Click system allows fast connection of the wire mesh tray without the need of fixings. Greater economy and quick assembly.

Universal mounting system compatible with Rejiband® grid trays, Pemsaband® sheet and PVC trays. A single support for all trays. Reduction in the number of references.

### Applications

Suitable for supporting medium loads of cable trays to the ceiling with 1 or 2 threaded rods for electrical installations and / or of telecommunications in: Civil works, tunnels, car parks, public buildings, commercial centres, large infrastructures such as: Airports, underground, rail, tertiary sector, industrial naval, petrochemical, textile, chemical and food applications, according to the finish.

### Solutions



FOOD INDUSTRY   RENEWABLE ENERGIES   DATA CENTERS   SERVICE AND RETAIL   FIRE RESISTANCE SOLUTION



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



| Product data                          |                           |                                |                            |
|---------------------------------------|---------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001003                  | u                              | 10                         |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,639                     | Material                       | Acero inoxidable AISI 316L |
| Protection System                     | INOX                      | SWL (kg)                       | 160                        |
| Finish                                | Stainless Steel AISI 316L | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 9D                  | Fire resistance                | E90 (90 min. 1000°C)       |
| Width (mm)                            | 100                       |                                |                            |
| kg/u                                  | 0,120                     |                                |                            |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧊 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications

