
Metatray inside riser cover



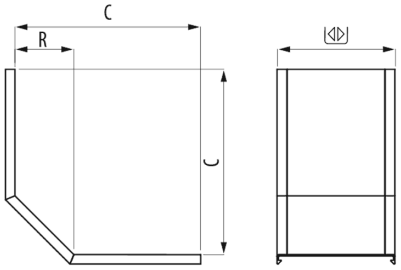

Description

Cover for insulating inside riser of 90º for the management of cable for Metatray® cables trays and trunkings. Made of PVC-based Thermoplastic insulating material Grey RAL 7035 colour.

Advantages

Snap fit installation without any fixings.

Insulating material, electrical safety and reduced maintenance costs.

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Applications

Suitable for the protection of insulating inside riser in the support, protection and conduction of cables in electrical and telecommunications installations in differen sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metatray inside riser cover

Main technical characteristics

Colour Grey RAL 7035

60, 100

100, 150, 200, 300, 400, 500, 600

1

-20 / 60 °C

GRADO UL94: V0

Resistant acc. to UL568

ETIM 10 EC002402

Product data

		Ref	kg/u
60	100	82003715	0,261
60	150	82003716	0,373
60	200	82003717	0,487
60	300	82003718	0,880
60	400	82003719	1,160
100	500	82003720	2,040
100	600	82003721	2,610
100	200	82004064	0,640
100	300	82004065	1,160
100	400	82004066	1,520

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."