
Accessories Insulating Trays

30/10/2026

Metatray inside riser cover (Ref: 82003720)



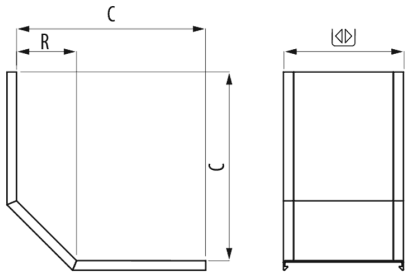

Description

Cover for insulating inside riser of 90º for the management of cable for Metatray® cables trays and trunkings. Width 500 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Snap fit installation without any fixings.

Applications

Suitable for the protection of insulating inside riser in the support, protection and conduction of cables in electrical and telecommunications installations in differen sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Metatray inside riser cover (Ref: 82003720)

Product data

ETIM 10	EC002402	**Material**	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,005	**Working temperature range (°C)**	-20 / 60 °C
Colour	Grey RAL 7035	**Fire resistance**	GRADO UL94: V0
Flange (mm)	100	**UV Behaviour**	Resistant acc. to UL568
Width (mm)	500		
kg/u	2,040		
u	1		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."