
Cable Tray Accessories

Inside Riser Cover Click (Ref: 73065400)



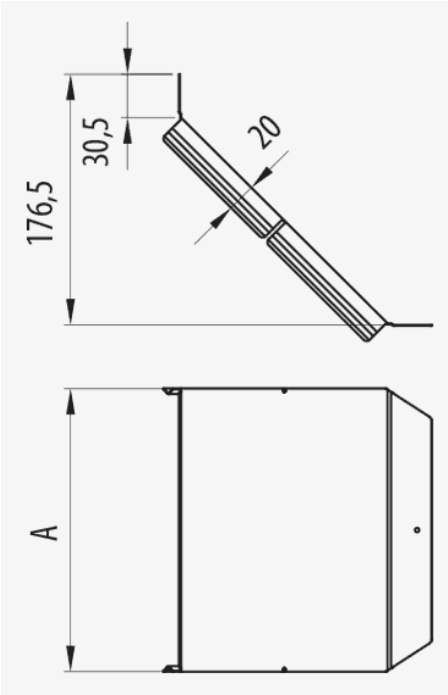

Description

Metal cover for the protection of cables in the 90° Click Inside Riser. Width 400 mm, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

Easy access to the riser in the case of having to make any modification to the electrical installation.

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation ofPemsaband® One perforated and solid tray installations where the 90° Click Inside Riser is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Inside Riser Cover Click (Ref: 73065400)

Product data

ETIM 10	EC002402	**kg/u**	0,617
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	3,278	**u**	1
Protection System	INOX	**Material**	Acero inoxidable AISI 316L
Finish	Stainless Steel AISI 316L	**Working temperature range (°C)**	-50 / 150 ºC
Resistance Class	Class 9D	**Fire resistance**	A1 No combustible
Width (mm)	400		
R (mm)	100		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."