


Inside Riser Cover Click (Ref: 73065500)

03/05/2024 1/2





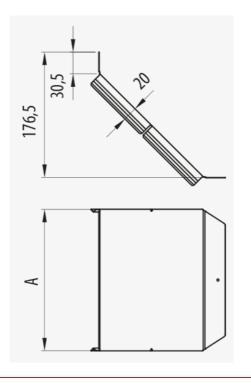



Metal cover for the protection of cables in the 90° Click Inside Riser. Width 500 mm, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

Easy access to the riser in the case of having to make any modification to the electrical installation.

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the 90° Click Inside Riser is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



🔣 RVE-1 🄛 🖪 😁 🖪 🤇 🦉 E90

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

pemsa

Cable Tray Accessories

© Protection System

Inside Riser Cover Click (Ref: 73065500)

03/05/2024 2/2

Product data

Protection System	INOX	kg/u	0.764
Finish	Stainless Steel AISI 316L	u	1
Resistance Class	Class 9D	Material	Acero inoxidable AISI 316L
Width (mm)	500	Working temperature range (°C)	-50 / 150 °C
R stat. (mm)	100	Fire resistance	A1 No combustible

PG - Pregalvanised EZ - Electrogalvanised BC - Electrogalvanised Bichromate BC - Electrogalvanised Bichromate GC - High Resistance Coating GC - Hot Dip Galvanising INOX - Stainless Steel PT - Polyester Paint AL - Aluminum IN- Brass or Nickel-plated brass PC - Bass - Nalogen Free Polycarbonate + ABS PXC - Polyvinyl Chloride
BC - Electrogalvanised Bichromate BK8 - High Resistance Coating GC - Hot Dip Galvanising INOX - Stainless Steel PT - Polyester Paint AL - Aluminum IN - Brass or Nickel-plated brass ION - Stainless or Nickel-plated brass PC+ABS - Halogen Free Polycarbonate + ABS
BK8 - High Resistance Coating GC - Hot Dip Galvanising INOX - Stainless Steel PT - Polyester Paint AL - Aluminum LN - Brass or Nickel-plated brass Image: Comparise C
GC - Hot Dip Galvanising INOX - Stainless Steel PT - Polyester Paint AL - Aluminum LN - Brass or Nickel-plated brass IN - Brass or Nickel-plated brass PC+ABS - Halogen Free Polycarbonate + ABS
INOX - Stainless Steel PT - Polyester Paint AL - Aluminum LN - Brass or Nickel-plated brass PC+ABS - Halogen Free Polycarbonate + ABS
PT - Polyester Paint AL - Aluminum LN - Brass or Nickel-plated brass Insulating materials PC+ABS - Halogen Free Polycarbonate + ABS
AL - Aluminum LN - Brass or Nickel-plated brass
EN - Brass or Nickel-plated brass Insulating materials PC+ABS - Halogen Free Polycarbonate + ABS
Insulating materials PC+ABS - Halogen Free Polycarbonate + ABS
PC+ABS - Halogen Free Polycarbonate + ABS
DIC Detained Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



155 MAVE-1 😫 🖻 👄 🖪 (E 🐖 E90

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."