
# Metatray outside riser cover ( Ref: 82004063 )



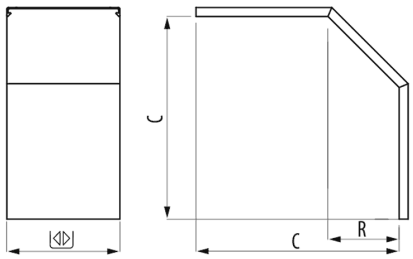


## Description

Cover for insulating outside riser of 90º for the management of cable for Metatray® cables trays and trunkings. Width 400 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

## Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Snap fit installation without any fixings.

## Applications

Suitable for the protection of insulating outside riser in the support, protection and conduction of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Metatray outside riser cover ( Ref: 82004063 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC002402 | **Material** | PVC |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 0,005 | **Working temperature range (°C)** | -20 / 60 °C |
| **Colour** | Grey RAL 7035 | **Fire resistance** | GRADO UL94: V0 |
| **Flange (mm)** | 100 | **UV Behaviour** | Resistant acc. to UL568 |
| **Width (mm)** | 400 | | |
| **kg/u** | 1,830 | | |
| **u** | 1 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."