
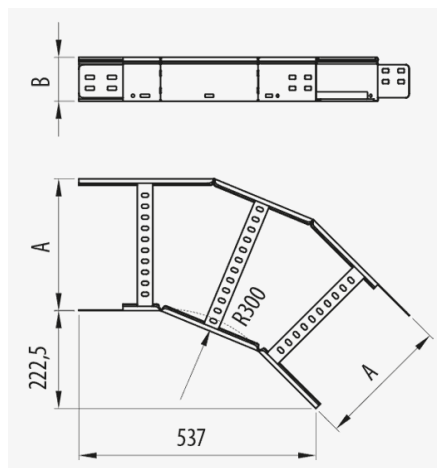


45° Bend Cover MEGAband

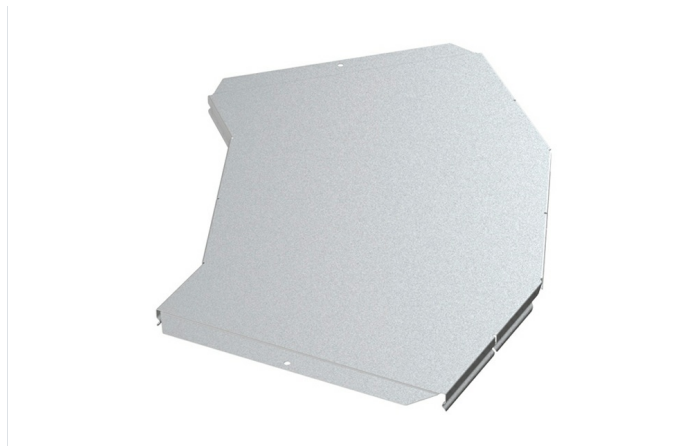

Description

Metal accessory for the protection of the Megaband® ladder 45° bend. Quick connection assembly by Click system, without fixings. Made of steel and available in various sizes.

Advantages

Click-connection system. Quick assembly without fasteners.

Notable savings in joints and installation time.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 7.

Applications

Used for the protection of flat 45° Megaband® ladder bends in the management of cables in electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

Solutions



Main technical characteristics

 GC	 Class 6	 100, 600, 500, 150, 200, 300, 400, 450	 300	45	 1	 Steel with surface coating
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001569				

Product data

	Ref	kg/u
100	82003305	0,434
600	82003442	2,810
500	82003456	2,270
150	94730150	0,617
200	94730200	0,812
300	94730300	1,240
400	94730400	1,710
450	94730450	1,970

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic