


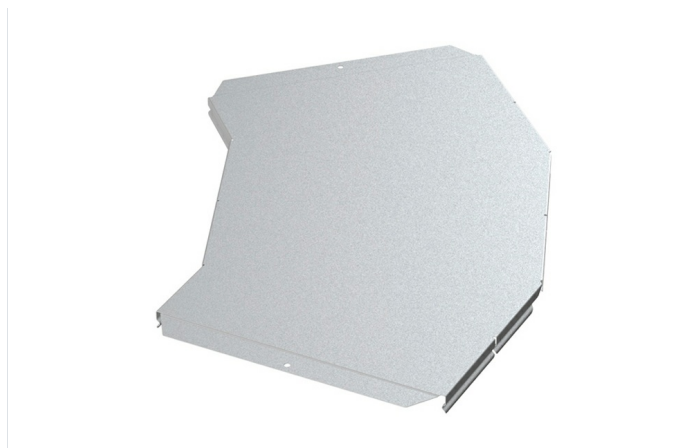

### Description

Metal accessory for the protection of the Megaband® ladder 45° bend. Width 600 mm, Angle of 45 °, With GC protection system. Quick connection assembly by Click system, without fixings. Made of steel and available in various sizes.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 7.

Click-connection system. Quick assembly without fasteners.

Notable savings in joints and installation time.

### Applications

Used for the protection of flat 45° Megaband® ladder bends in the management of cables in electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

### Solutions



## Product data

|                                              |                         |                                       |                            |
|----------------------------------------------|-------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC001569                | <b>kg/u</b>                           | 2,810                      |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 7,278                   | <b>u</b>                              | 1                          |
| <b>Protection System</b>                     | GC                      | <b>Material</b>                       | Steel with surface coating |
| <b>Finish</b>                                | HDG, Hot Dip Galvanised | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Resistance Class</b>                      | Class 6                 | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Width (mm)</b>                            | 600                     |                                       |                            |
| <b>R (mm)</b>                                | 300                     |                                       |                            |
| <b>Angle</b>                                 | 45                      |                                       |                            |

## 🔒 Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## 🏠 Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

