
Ladder Tray Accessories

19/11/2026



# 45° Bend Cover MEGAband ( Ref: 82003456 )

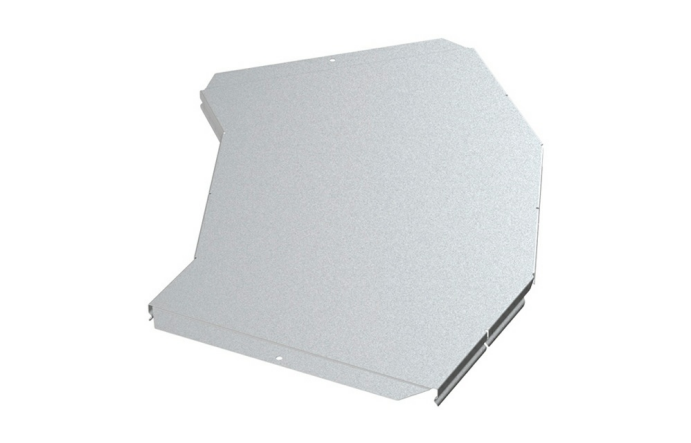

## Description

Metal accessory for the protection of the Megaband® ladder 45° bend. Width 500 mm, Angle of 45 °, With GC protection system. Quick connection assembly by Click system, without fixings. Made of steel and available in various sizes.

## Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 7.

Click-connection system. Quick assembly without fasteners.

Notable savings in joints and installation time.

## Applications

Used for the protection of flat 45° Megaband® ladder bends in the management of cables in electrical and telecommunication installations in public buildings, infrastructures and civil works, industrial installations, tertiary sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# 45° Bend Cover MEGAband ( Ref: 82003456 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001569 | **kg/u** | 2,270 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Working temperature range (°C)** | -50 / 150 °C |
| **Resistance Class** | Class 6 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 500 | | |
| **R (mm)** | 300 | | |
| **Angle** | 45 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."