


**Metatray 90° bend cover** ( Ref: 82004067 )

1/2

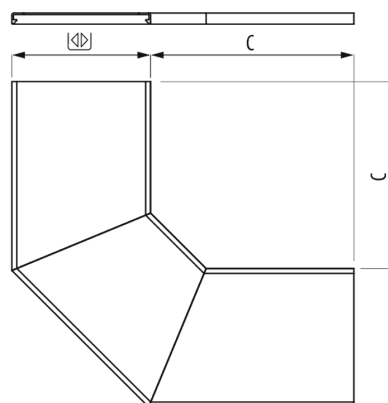

### Description

Cover for insulating accessory for the management of cables with 90° for Metatray® cables trays and trunkings. Of 100 mm height, Width 200 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

### Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Snap fit installation without any fixings.

### Applications

Suitable for the protection of 90° bends in the support, protection and conduction of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                       |               |                                |                         |
|---------------------------------------|---------------|--------------------------------|-------------------------|
| ETIM 10                               | EC002402      | Material                       | PVC                     |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 0,002         | Working temperature range (°C) | -20 / 60 °C             |
| Colour                                | Grey RAL 7035 | Fire resistance                | GRADO UL94: V0          |
| Flange (mm)                           | 100           | UV Behaviour                   | Resistant acc. to UL568 |
| Width (mm)                            | 200           |                                |                         |
| kg/u                                  | 0,674         |                                |                         |
| u                                     | 1             |                                |                         |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic

