


90° PQ Bend Cover

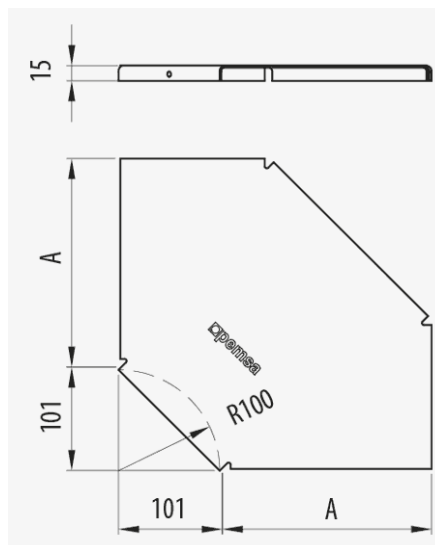

Description

Cover designed for the protection of a 90° PQ bend for use with the Pemsaband® PQ tray of heights 15, 30, 50 and 60 mm in the wiring installation. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Used for the protection of cables in the 90° bend of Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



Main technical characteristics									
 GC	 Class 8	 100, 150, 200, 300, 400	 100	90	 1	 Steel with surface coating	 -50 / 150 °C		
 A1 No combustible	ETIM 10 EC001569								

Product data		
	Ref	kg/u
100	70303010	0,591
150	70303015	0,928
200	70303020	1,380
300	70303030	2,360
400	70303040	3,670

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic