


90° PQ Bend Cover (Ref: 70303010)

1/2

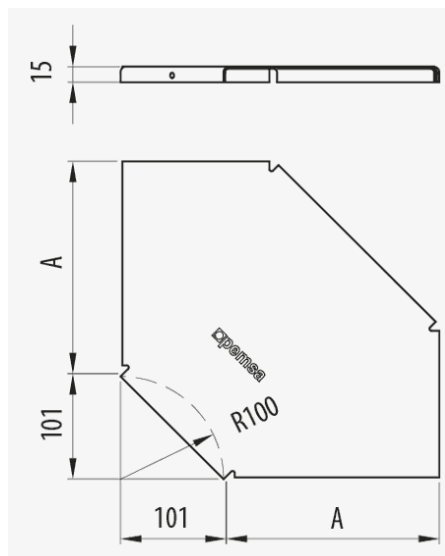

Description

Cover designed for the protection of a 90° PQ bend for use with the Pemsaband® PQ tray of heights 15, 30, 50 and 60 mm in the wiring installation. Width 100 mm, Angle of 90 °. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for widths from 100 to 600.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

Applications

Used for the protection of cables in the 90° bend of Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



90° PQ Bend Cover (Ref: 70303010)

2/2

Product data

ETIM 10	EC001569	kg/u	0,591
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,532	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 8	Fire resistance	A1 No combustible
Width (mm)	100		
R (mm)	100		
Angle	90		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

