
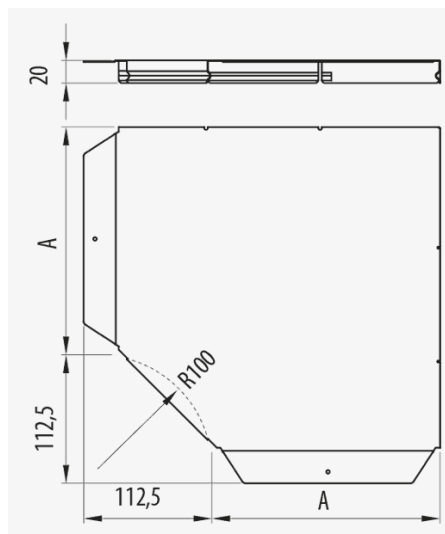


## 90° Bend Cover Click ( Ref: 73020600 )

1/2

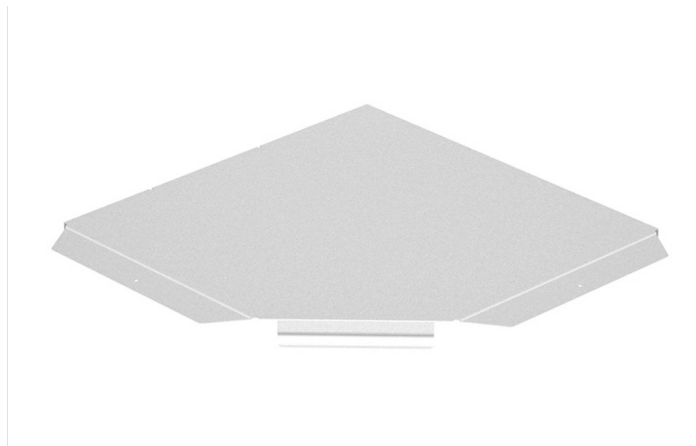

### Description

Metal cover for the 90° Click bend to protect the cables in the electrical wiring in installations of the Pemsaband® and Inducanal® trays whilst maintaining the electrical continuity, according to standard UNE-EN 61537. Width 600 mm, Angle of 90 °, With PG protection system, PG3 finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

### Advantages

The ends have an overlap to improve the fit with straight lids.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Press-fit click system requiring no additional parts.

### Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforée et pleine tray installations where the 90 ° Click fit bend is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



# 90° Bend Cover Click ( Ref: 73020600 )

## Product data

|                                       |                    |                                |                            |
|---------------------------------------|--------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC001569           | kg/u                           | 3,290                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 10,627             | u                              | 1                          |
| Protection System                     | PG                 | Material                       | Steel with surface coating |
| Finish                                | PG3, Pregalvanised | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 3            | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 600                |                                |                            |
| R (mm)                                | 100                |                                |                            |
| Angle                                 | 90                 |                                |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

