
Cable Tray Accessories

30/10/2026

90° Bend Cover Click (Ref: 73030500)



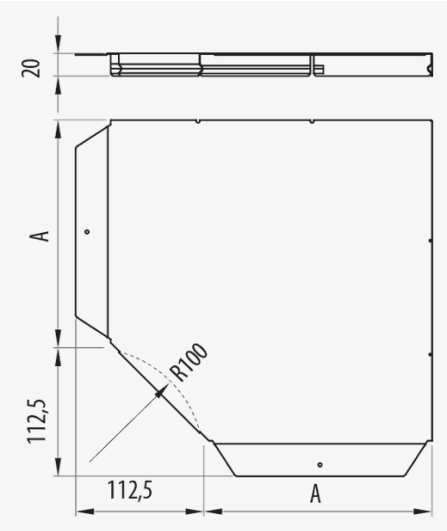

Description

Metal cover for the 90° Click bend to protect the cables in the electrical wiring in installations of the Pemsaband® and Inducanal® trays whilst maintaining the electrical continuity, according to standard UNE-EN 61537. Width 500 mm, Angle of 90 °, With GC protection system, HDG finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

The ends have an overlap to improve the fit with straight lids.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforée et pleine tray installations where the 90 ° Click fit bend is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

90° Bend Cover Click (Ref: 73030500)

Product data

ETIM 10	EC001569	**kg/u**	2,620
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	6,786	**u**	1
Protection System	GC	**Material**	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	**Working temperature range (°C)**	-50 / 150 °C
Resistance Class	Class 5	**Fire resistance**	A1 No combustible
Width (mm)	500		
R (mm)	100		
Angle	90		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."