


90° Bend Cover Click (Ref: 73050600)

1/2

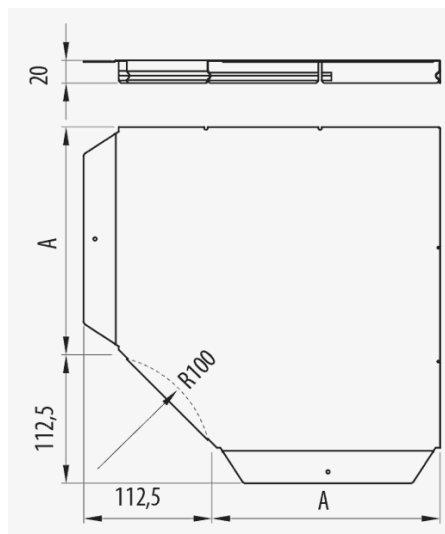

Description

Metal cover for the 90° Click bend to protect the cables in the electrical wiring in installations of the Pemsaband® and Inducanal® trays whilst maintaining the electrical continuity, according to standard UNE-EN 61537. Width 600 mm, Angle of 90 °, With INOX protection system, I304 finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

The ends have an overlap to improve the fit with straight lids.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforée et pleine tray installations where the 90 ° Click fit bend is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



90° Bend Cover Click (Ref: 73050600)

Product data

ETIM 10	EC001569	kg/u	2,880
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	15,293	u	1
Protection System	INOX	Material	Stainless steel AISI 304
Finish	Stainless Steel AISI 304	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9C	Fire resistance	A1 No combustible
Width (mm)	600		
R (mm)	100		
Angle	90		

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

