


90° Bend Cover Click (Ref: 73060100)

1/2

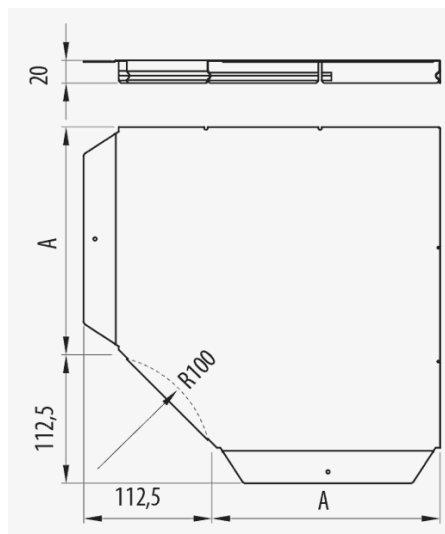

Description

Metal cover for the 90° Click bend to protect the cables in the electrical wiring in installations of the Pemsaband® and Inducanal® trays whilst maintaining the electrical continuity, according to standard UNE-EN 61537. Width 100 mm, Angle of 90 °, With INOX protection system, I316L finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

The ends have an overlap to improve the fit with straight lids.

Available in various protection systems: PG, GC, BK8, AZ+ and stainless steel AISI 304 and AISI 316L.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforée et pleine tray installations where the 90 ° Click fit bend is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001569	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,239	
Protection System		INOX	
Finish		Stainless Steel AISI 316L	
Resistance Class		Class 9D	
Width (mm)		100	
R (mm)		100	
Angle		90	
		kg/u	0,233
		u	1
		Material	Acero inoxidable AISI 316L
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

