
Crossover Cover Click



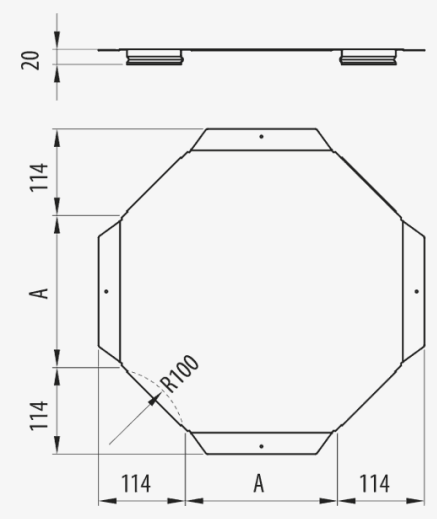

Description

Metal cover for the protection of cables in the Click Crossover. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

Press-fit click system requiring no additional parts.

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Crossover is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Crossover Cover Click

Main technical characteristics

100, 150, 200, 300, 400, 500, 600	100	1	-50 / 150 °C	A1 No combustible	ETIM 10 EC002404

Product data

Ⓢ	Class IEC 61537	⟷	REF	kg/u	Ⓜ
PG	Class 3	100	73024100	0,457	Steel with surface coating
PG	Class 3	150	73024150	0,680	Steel with surface coating
PG	Class 3	200	73024200	0,933	Steel with surface coating
PG	Class 3	300	73024300	1,540	Steel with surface coating
PG	Class 3	400	73024400	2,270	Steel with surface coating
PG	Class 3	500	73024500	3,120	Steel with surface coating
PG	Class 3	600	73024600	4,100	Steel with surface coating
GC	Class 5	100	73034100	0,505	Steel with surface coating
GC	Class 5	150	73034150	0,731	Steel with surface coating
GC	Class 5	200	73034200	1,010	Steel with surface coating
GC	Class 5	300	73034300	1,650	Steel with surface coating
GC	Class 5	400	73034400	2,440	Steel with surface coating
GC	Class 5	500	73034500	3,350	Steel with surface coating
GC	Class 5	600	73034600	4,400	Steel with surface coating
INOX	Class 9C	100	73054100	0,400	Stainless steel AISI 304
INOX	Class 9C	150	73054150	0,595	Stainless steel AISI 304
INOX	Class 9C	200	73054200	0,817	Stainless steel AISI 304
INOX	Class 9C	300	73054300	1,350	Stainless steel AISI 304
INOX	Class 9C	400	73054400	1,980	Stainless steel AISI 304
INOX	Class 9C	500	73054500	2,730	Stainless steel AISI 304
INOX	Class 9C	600	73054600	3,580	Stainless steel AISI 304
INOX	Class 9D	100	73064100	0,400	Acero inoxidable AISI 316L
INOX	Class 9D	150	73064150	0,595	Acero inoxidable AISI 316L
INOX	Class 9D	200	73064200	0,817	Acero inoxidable AISI 316L
INOX	Class 9D	300	73064300	1,350	Acero inoxidable AISI 316L
INOX	Class 9D	400	73064400	1,980	Acero inoxidable AISI 316L
INOX	Class 9D	500	73064500	2,730	Acero inoxidable AISI 316L
INOX	Class 9D	600	73064600	3,580	Acero inoxidable AISI 316L

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Crossover Cover Click

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."