


Crossover Cover Click

1/3

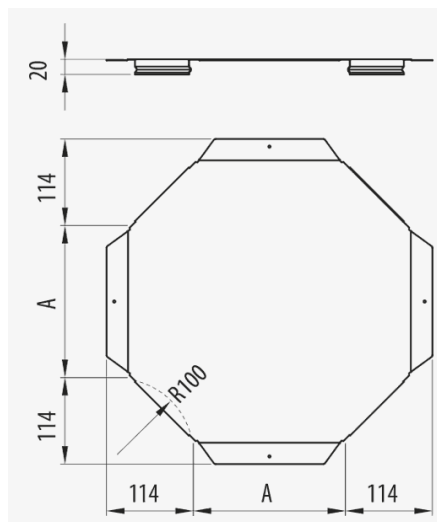

Description

Metal cover for the protection of cables in the Click Crossover. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

Press-fit click system requiring no additional parts.

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Crossover is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 100, 150, 200, 300, 400, 500, 600	 100	 1	 -50 / 150 °C	 A1 No combustible	ETIM EC002404
---	---	---	--	---	------------------

Product data

Ⓢ	Class		Ref	kg/u	Ⓜ
PG	Class 3	100	73024100	0.354	Steel with surface coating
PG	Class 3	150	73024150	0.526	Steel with surface coating
PG	Class 3	200	73024200	0.721	Steel with surface coating
PG	Class 3	300	73024300	1.380	Steel with surface coating
PG	Class 3	400	73024400	2.310	Steel with surface coating
PG	Class 3	500	73024500	3.180	Steel with surface coating
PG	Class 3	600	73024600	4.180	Steel with surface coating
GC	Class 5	100	73034100	0.450	Steel with surface coating
GC	Class 5	150	73034150	0.667	Steel with surface coating
GC	Class 5	200	73034200	0.915	Steel with surface coating
GC	Class 5	300	73034300	1.381	Steel with surface coating
GC	Class 5	400	73034400	2.501	Steel with surface coating
GC	Class 5	500	73034500	3.441	Steel with surface coating
GC	Class 5	600	73034600	4.521	Steel with surface coating
INOX	Class 9C	100	73054100	0.287	Stainless steel AISI 304
INOX	Class 9C	150	73054150	0.426	Stainless steel AISI 304
INOX	Class 9C	200	73054200	0.584	Stainless steel AISI 304
INOX	Class 9C	300	73054300	0.961	Stainless steel AISI 304
INOX	Class 9C	400	73054400	1.420	Stainless steel AISI 304
INOX	Class 9C	500	73054500	1.950	Stainless steel AISI 304
INOX	Class 9C	600	73054600	2.560	Stainless steel AISI 304
INOX	Class 9D	100	73064100	0.287	Acero inoxidable AISI 316L
INOX	Class 9D	150	73064150	0.426	Acero inoxidable AISI 316L
INOX	Class 9D	200	73064200	0.584	Acero inoxidable AISI 316L
INOX	Class 9D	300	73064300	0.961	Acero inoxidable AISI 316L
INOX	Class 9D	400	73064400	1.420	Acero inoxidable AISI 316L
INOX	Class 9D	500	73064500	1.950	Acero inoxidable AISI 316L
INOX	Class 9D	600	73064600	2.560	Acero inoxidable AISI 316L

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising

Crossover Cover Click

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

