
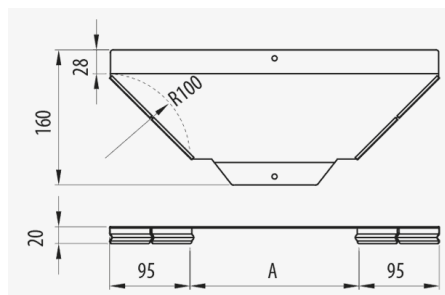


Side Entry Cover Click (Ref: 73033500)

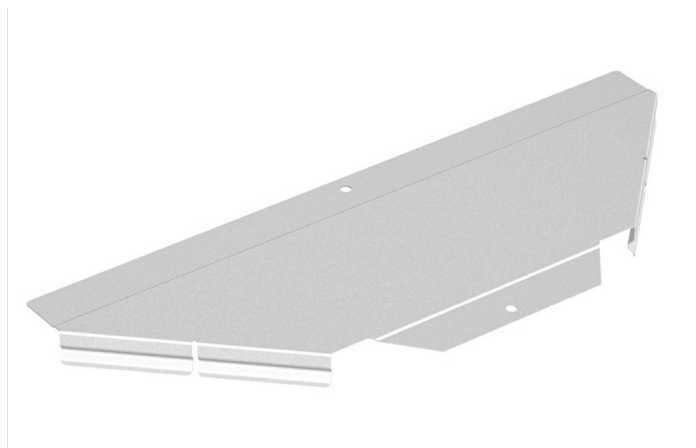

Description

Metal cover for the protection of cables in the Click Side Entry. Width 500 mm, With GC protection system, HDG finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Side Entry is used for installations in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions




Product data			
Protection System	GC	kg/u	0.834
Finish	HDG, Hot Dip Galvanised	u	1
Resistance Class	Class 5	Material	Steel with surface coating
Width (mm)	500	Working temperature range (°C)	-50 / 150 °C
R stat. (mm)	100	Fire resistance	A1 No combustible

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass
Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Side Entry Cover Click (Ref: 73033500)

Product applications

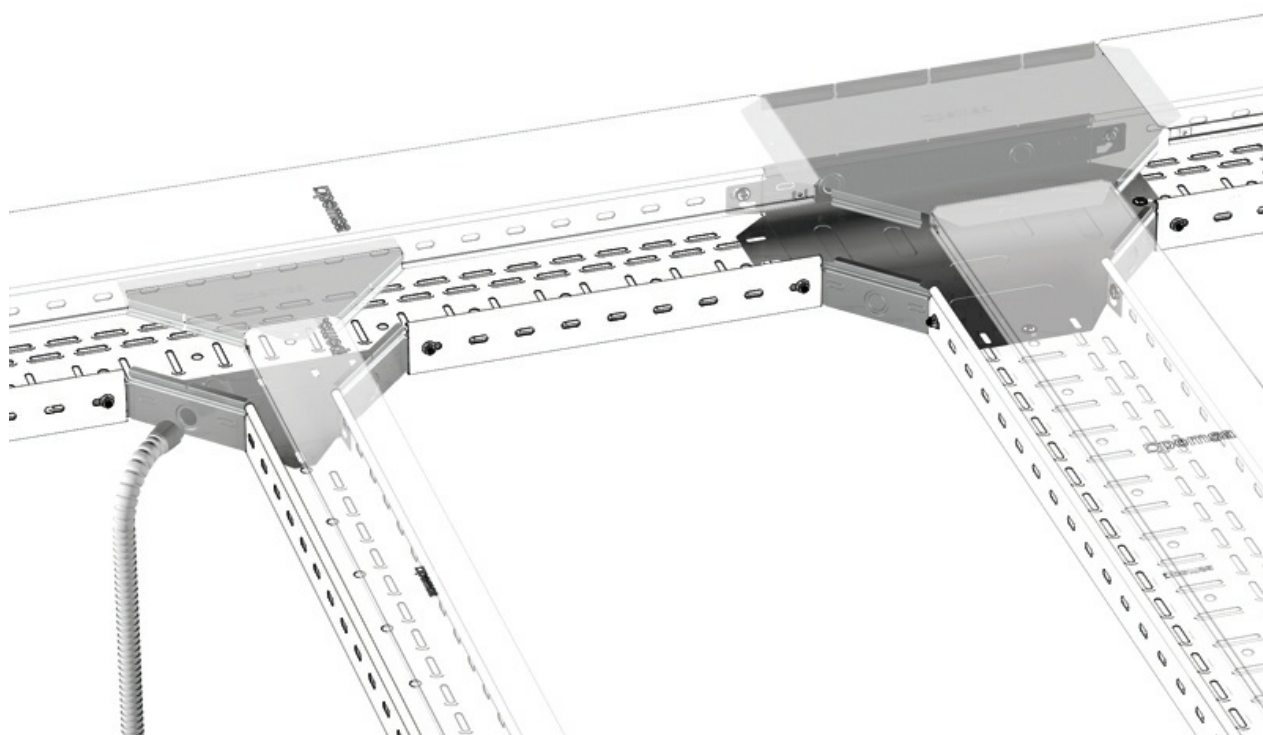

Side Entry Cover Click (Ref: 73033500)

