

Side Entry Cover Click (Ref: 73053300)



Description

Metal cover for the protection of cables in the Click Side Entry. Width 300 mm, With INOX protection system, I304 finish. It has a press-fit assembly system. Made of steel and available in various sizes and Protection Systems.

Advantages

The ends have an overlap to improve the fit with straight lids.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Press-fit click system requiring no additional parts.

Applications

It is used for the protection of wiring in the installation of Pemsaband® One perforated and solid tray installations where the Click Side Entry is used for installations: in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions




Product data			
ETIM 10		EC002401	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		1,929	
Protection System		INOX	
Finish		Stainless Steel AISI 304	
Resistance Class		Class 9C	
Width (mm)		300	
R (mm)		100	
kg/u		0,363	
u		1	
Material		Stainless steel AISI 304	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Side Entry Cover Click (Ref: 73053300)

Product applications

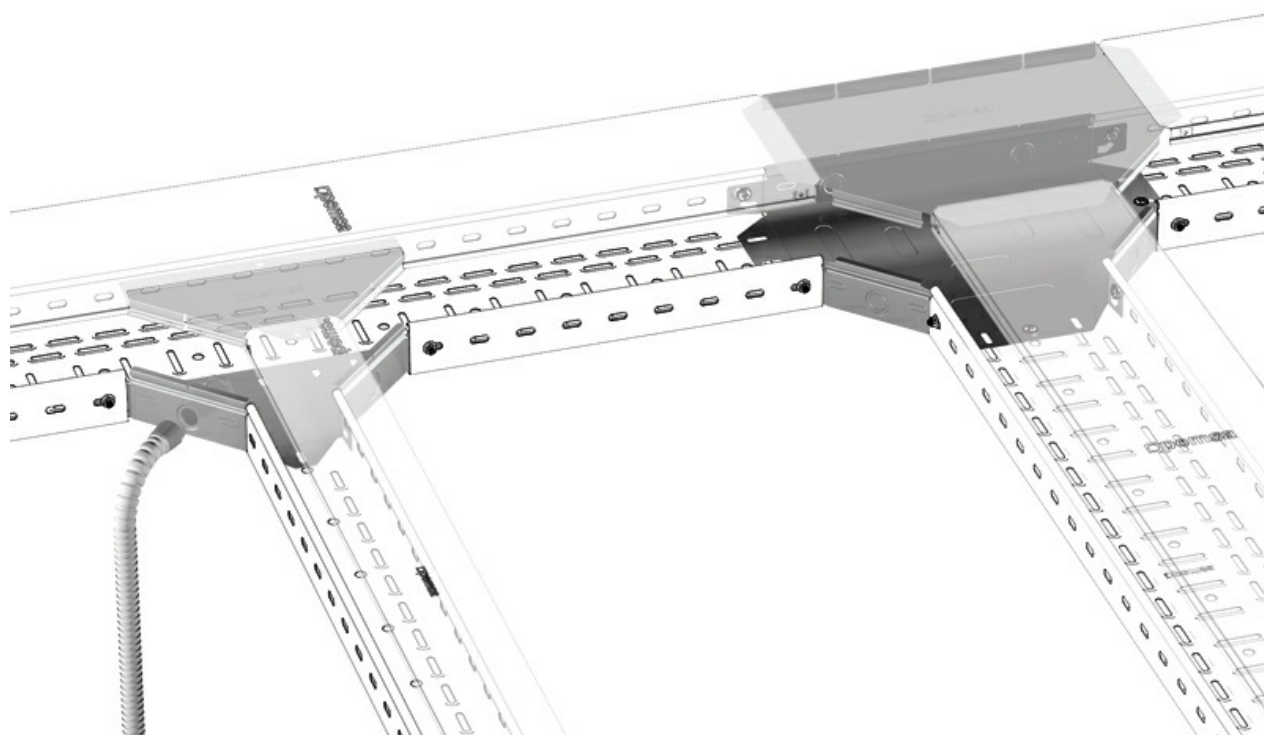

Side Entry Cover Click (Ref: 73053300)

