


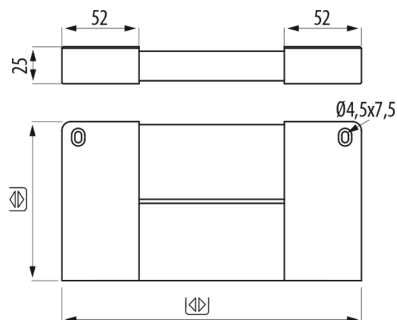

Description

Cover for the final closure of Metatray® cables trays and trunkings. Of 60 mm height, Width 150 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Protection and maximum tightness, IP2X or IP4X.

Applications

Solutions



Product data			
ETIM 10	EC001574	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0	Working temperature range (°C)	-20 / 60 °C
Colour	Grey RAL 7035	Fire resistance	GRADO UL94: V0
Flange (mm)	60	UV Behaviour	Resistant acc. to UL568
Width (mm)	150		
kg/u	0,077		
u	2		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications



