


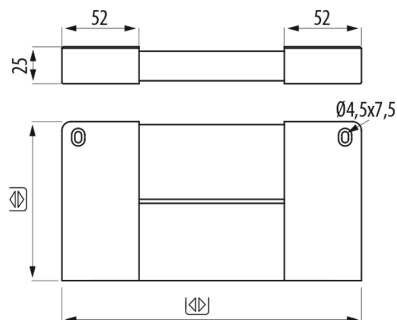

Description

Cover for the final closure of Metatray® cables trays and trunkings. Of 100 mm height, Width 600 mm. Made of PVC-based Thermoplastic insulating material. Grey RAL 7035 colour.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Insulating material, electrical safety and reduced maintenance costs.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Protection and maximum tightness, IP2X or IP4X.

Applications

Solutions



Product data

ETIM 10	EC001574	Material	PVC
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,001	Working temperature range (°C)	-20 / 60 °C
Colour	Grey RAL 7035	Fire resistance	GRADO UL94: V0
Flange (mm)	100	UV Behaviour	Resistant acc. to UL568
Width (mm)	600		
kg/u	0,312		
u	2		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications



