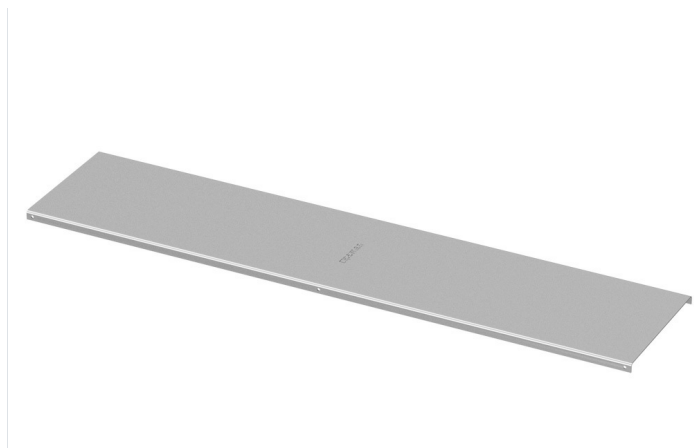


Description

Straight solid metal cover for the straight sections of the Megaband® CPS metal ladder, achieving greater protection of the wiring. Width 300 mm, With AL protection system. Mounting with bolts. Made from Aluminium alloy 6063T6.

Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

Optimum adjustment on the metal trays giving them a greater protection.

Precise screw fixation system for a better fit and closure

CEPSA product approval according to ESP-2208-5 specification.

Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

Solutions



Product data

ETIM 10	EC002403	u	3
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Aluminum
Protection System	AL	IP	IP44
Finish	1050H24 Aluminium	Working temperature range (°C)	-50 / 150 °C
Width (mm)	300	Fire resistance	A1 No combustible
Length (m)	3		
kg/u	1,680		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

