


**PQU Straight Cover** ( Ref: 70393005 )

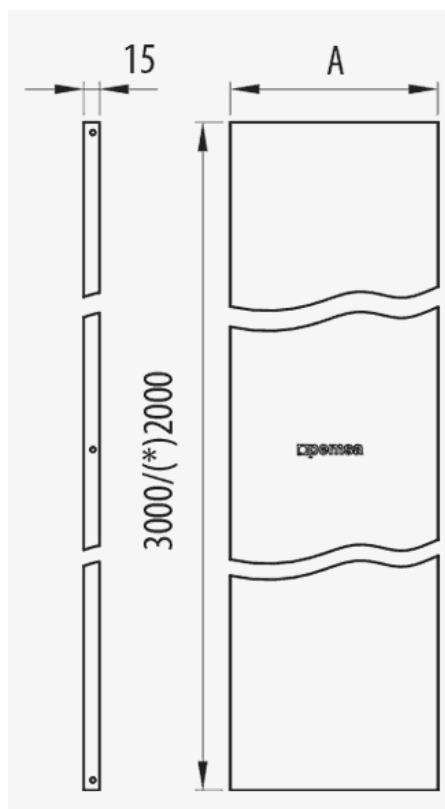

### Description

Straight metal cover for the protection of the straight sections of the Pemsaband® PQU trays. Width 50 mm. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

The sheet metal tray, plus the cover, becomes a protective trunking in grade IP2X.

Optimum adjustment on the metal trays giving them a greater protection.

Easy and fast assembly system.

### Applications

Used for the protection of the Electrical and Telecommunications Wiring housed in Pemsaband® PQU trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

### Solutions



Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC002403                | kg/u                           | 1,150                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 5,957                   | u                              | 2                          |
| Protection System                     | GC                      | Material                       | Steel with surface coating |
| Finish                                | HDG, Hot Dip Galvanised | Working temperature range (°C) | -50 / 150 °C               |
| Resistance Class                      | Class 8                 | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 50                      |                                |                            |
| Length (m)                            | 2                       |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic