


PQU Straight Cover (Ref: 70393150)

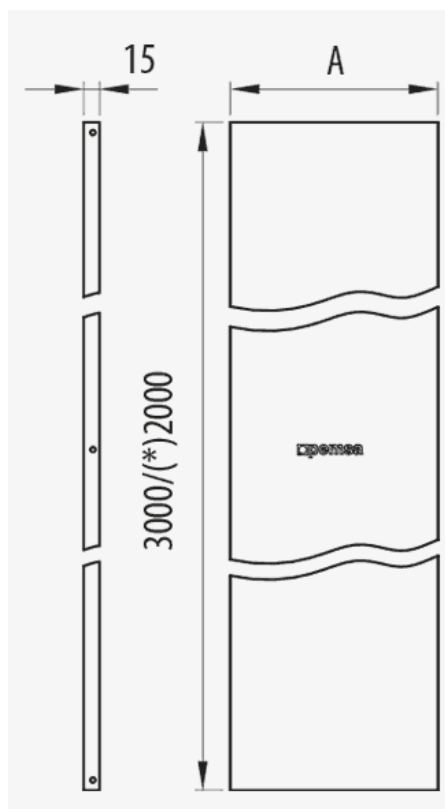

Description

Straight metal cover for the protection of the straight sections of the Pemsaband® PQU trays. Width 500 mm. Approved according to CEPSA and REPSOL specifications. Made of steel and with GC Protection System 85 microns thick.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

The sheet metal tray, plus the cover, becomes a protective trunking in grade IP2X.

Optimum adjustment on the metal trays giving them a greater protection.

Easy and fast assembly system.

Applications

Used for the protection of the Electrical and Telecommunications Wiring housed in Pemsaband® PQU trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



PQU Straight Cover (Ref: 70393150)

2/2

Product data			
ETIM 10		EC002403	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		69,075	
Protection System		GC	
Finish		HDG, Hot Dip Galvanised	
Resistance Class		Class 8	
Width (mm)		500	
Length (m)		3	
kg/u		8,890	
u		3	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic