


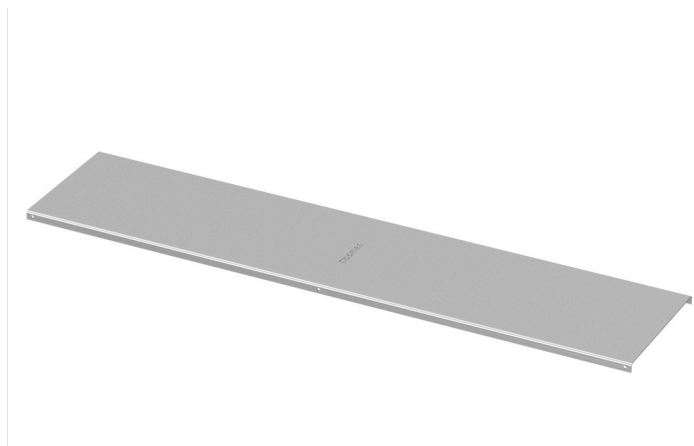

Description

Metal cover to protect the straight sections of the Pemsaband® PQU AL trays. Made from aluminum alloy 1050H24. Width 100 mm, With AL protection system

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Light and easy to install due to the low density of the aluminium against other metallic materials.

It allows covering the straight sections of the Pemsaband® PQU AL cable trays, achieving maximum protection of the wiring.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Product data

ETIM 10	EC002403	u	3
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Aluminum
Protection System	AL	Working temperature range (°C)	-50 / 150 °C
Finish	1050H24 Aluminium	Fire resistance	A1 No combustible
Width (mm)	100		
Length (m)	3		
kg/u	0,510		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🏠 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

□

