


Metatray insulating cover (Ref: 82003663)

1/4

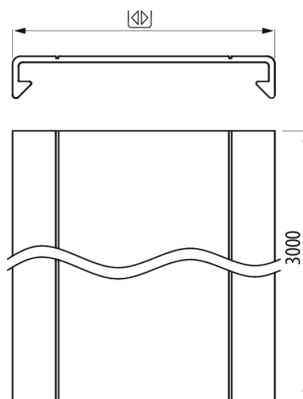

Description

Cover in insulating material. Width 100 mm, Length of 3 metres. Grey RAL 7035 colour for the protection of Metatray perforated and solid insulating trays. Provides mechanical protection and watertightness. Configure the tray as a protective trunking.

Advantages

Cable tray cover (insulating protective trunking (according to EN 50085

Aenor N mark on product standards EN 61537 and EN 50085. CE compliance with directive 2014/35/EU.

Optimal fit of the cover on the insulating trays, giving them great protection.

Provides IP2X or IP4X protection grade and Impact Grade 20 J (EN 61537) or IK10 (EN50085)

Snap fit installation without any fixings.

Applications

Suitable for the protection of Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC002403	Impact Strength (J)	6 J
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,001	IP	IP44
Colour	Grey RAL 7035	Working temperature range (°C)	-20 / 60 °C
Width (mm)	100	Fire resistance	GRADO UL94: V0
Length (m)	3	UV Behaviour	Resistant acc. to UL568
kg/u	0,511		
u	24		
Material	PVC		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications



