
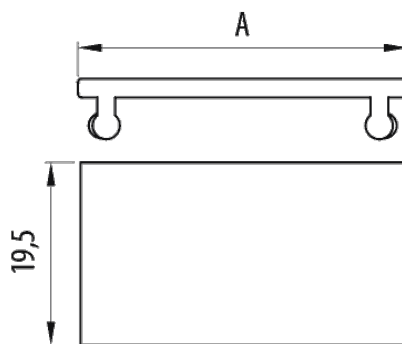


Clip Lid

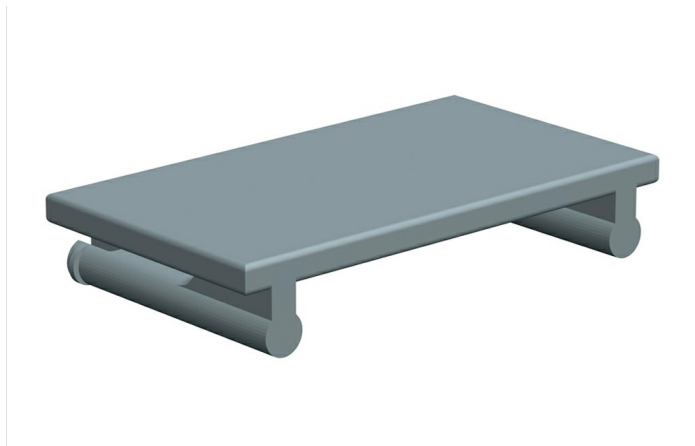

Description

Cover for the conduit clip of self-extinguishing polyamide 6 in grey colour RAL 7011 and black RAL 9005. Halogen-free, flame-retardant and available in various sizes. It ensures the fixing of the conduit to the support and facilitates the identification of the supports for flexible conduits in the Pemsaflex® range.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Ensures the fixation of the conduit to the support and facilitates the identification.

Working temperature: -25°C to + 105°C.

Available in two colours: Grey RAL 7011 and black RAL 9005.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

COLOUR Grey RAL 7011, Black RAL 9005	DN NW 7, NW12, NW14, NW23, NW29, NW36, NW48	Ⓜ Poyamide 6	🔥 -25 / 105 °C
☒ LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA	ETIM EC000455		

Product data

COLOUR	DN	A _{mm}	Ref	kg/u	📦
Grey RAL 7011	NW 7	20	31096000	0.001	100
Grey RAL 7011	NW12	22	31096200	0.001	50
Grey RAL 7011	NW14	28	31096400	0.001	50
Grey RAL 7011	NW23	35	31096500	0.001	50
Grey RAL 7011	NW29	43	31096600	0.002	30
Grey RAL 7011	NW36	54	31096700	0.002	20
Grey RAL 7011	NW48	68	31096800	0.003	20
Black RAL 9005	NW 7	20	32096000	0.001	100
Black RAL 9005	NW12	22	32096200	0.001	50
Black RAL 9005	NW14	28	32096400	0.001	50
Black RAL 9005	NW23	35	32096500	0.001	50
Black RAL 9005	NW29	43	32096600	0.002	30
Black RAL 9005	NW36	54	32096700	0.002	20
Black RAL 9005	NW48	68	32096800	0.003	20

🔩 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Clip Lid

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

