

# Clip Lid ( Ref: 32096200 )

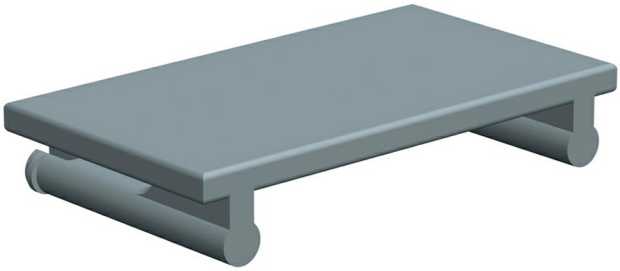

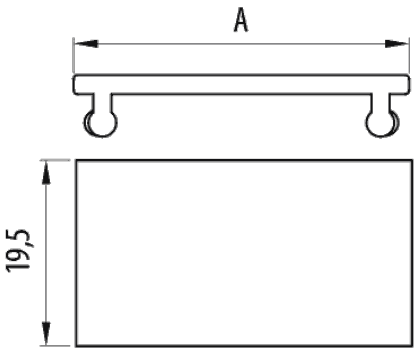


## Description

Cover for the conduit clip of self-extinguishing polyamide 6 in grey colour RAL 7011 and black RAL 9005. Halogen-free, flame-retardant and available in various sizes It ensures the fixing of the conduit to the support and facilitates the identification of the supports for flexible conduits in the Pemsaflex® range.

## Advantages

Ensures the fixation of the conduit to the support and facilitates the identification.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Available in two colours: Grey RAL 7011 and black RAL 9005.

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Working temperature: -25°C to + 105°C.

## Applications

Suitable for fixing Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots, vehicles and special facilities.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Clip Lid ( Ref: 32096200 )

## Product data

| | |
|---|---|
| **ETIM 10** | EC002320 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | |
| **Colour** | Black RAL 9005 |
| **DN** | NW12 |
| **A (mm)** | 22 |
| **kg/u** | 0,001 |

| | |
|---|---|
| **u** | 50 |
| **Material** | Polyamide 6 |
| **Working temperature range (°C)** | -25 / 105 ºC |
| **Fire resistance** | LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."