
TPK Cap



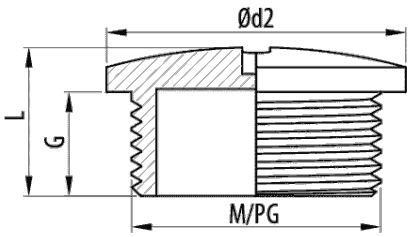

Description

TPK threaded plug with IP54/IP68 protection index (with O-ring) according to EN 60529. Available in metric thread from M12 to M40 and PG7 to PG36. Manufactured in self-extinguishing polyamide 6 grey RAL 7035.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Protection Index EN 60529: IP54 / IP68 (with O-ring).

Available in grey colour RAL 7035.

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Applications

Suitable for the capping of holes in boxes or electrical cabinets ensuring a degree of protection.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

Colour Grey RAL 7035

PG 7, PG 9, PG11, PG13, PG16, PG21, PG29, PG36, M12, M16, M20, M25, M32, M40, M50, M63

Polyamide 6

IP54

-25 / 90 °C

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10 EC000032

Product data

			L(mm)	REF	kg/u	
PG 7	6	15	8	44020007	0,001	100
PG 9	6	19	9	44020009	0,002	100
PG11	6	22	9	44020011	0,002	100
PG13	6	25	8.5	44020013	0,002	100
PG16	6	27	8.5	44020016	0,003	100
PG21	8	33	12	44020021	0,005	100
PG29	8	44	12	44020029	0,008	50
PG36	10	55	15	44020036	0,014	25
M12	6	15	8.5	44021120	0,001	100
M16	7	20	10	44021160	0,002	100
M20	7	24	10	44021200	0,005	100
M25	10	30	14	44021250	0,007	100
M32	10	37	14	44021320	0,014	50
M40	10	48	15	44021400	0,019	50
M50	13	56	18.5	81000215	0,016	25
M63	15	69	19	81000216	0,011	10

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

TPK Cap

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."